




HP Pavilion G7-2289wm Keyboard Replacement

This guide provides instruction on how to...

Written By: Ryson Smith

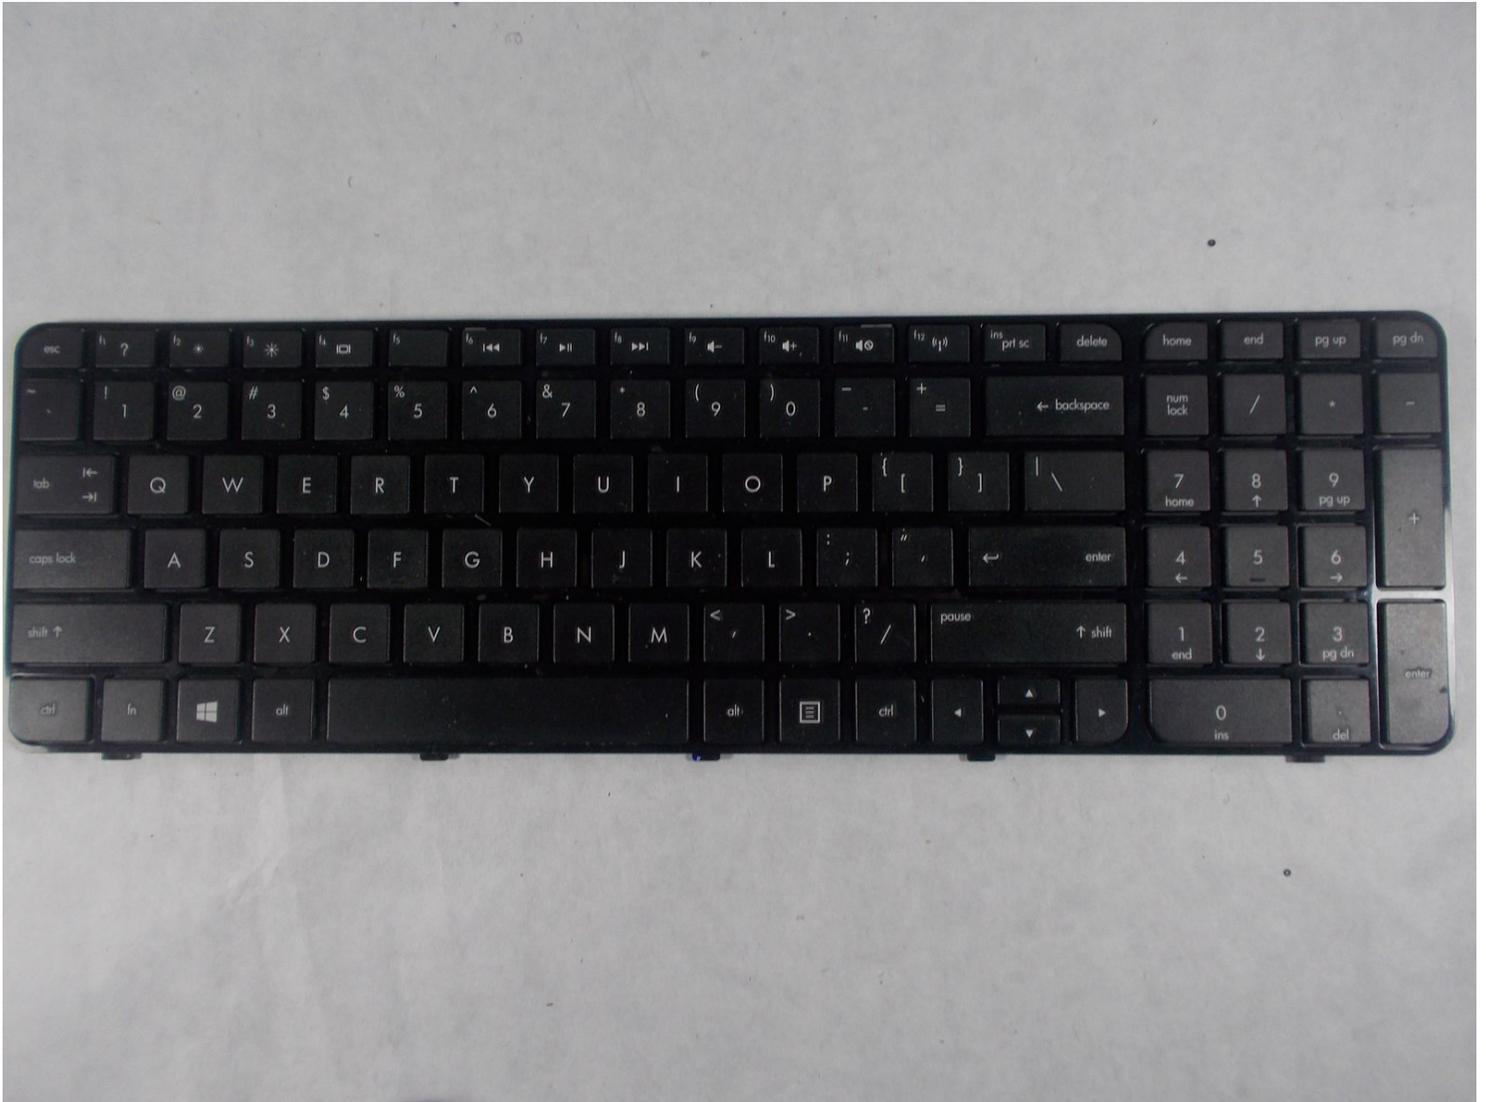

INTRODUCTION

This guide provides instruction on how to replace a damaged keyboard on the HP Pavilion G7-2289wm laptop.

TOOLS:

[Phillips #0 Screwdriver](#) (1)

[iFixit Opening Tool](#) (1)

Step 1 — Battery



- Located on the bottom side of your laptop, slide the battery release latch to the left, towards the center of the laptop.
- Lift the battery up, and pull towards the center of the laptop to remove it.

Step 2 — Keyboard



- Remove all the screw that secures the keyboard to the computer using a Phillips #0 screwdriver.

Step 3



- Flip your laptop around to the front, using an opening tool, pry around the perimeter of the keyboard.
- Lift the keyboard from the top backward towards the touch pad.
- Unlatch the keyboard connector from the motherboard and remove the keyboard.

To reassemble your device, follow these instructions in reverse order.