



# WEN 18 Gauge 2-Inch Air Brad Nailer Pressure Regulator Knob Replacement

This guide will aid in replacing the WEN 18 Gauge 2-Inch Air Brad Nailer Pressure Regulator Knob.

Written By: Ousman Jammeh



---

## INTRODUCTION

If you need to replace a Brad Nailer Pressure Regulator Knob, follow the steps outlined in this guide. For this guide, you will need a 2mm Allen wrench. The steps outlined are relatively easy to follow.

---



### TOOLS:


- [2.5 mm Hex Key](#) (1)
-

## Step 1 — Pressure Regulator Knob



- Using a 2mm Allen wrench, remove the Allen screw located on the pressure regulator knob on the back of the brad nailer.

## Step 2

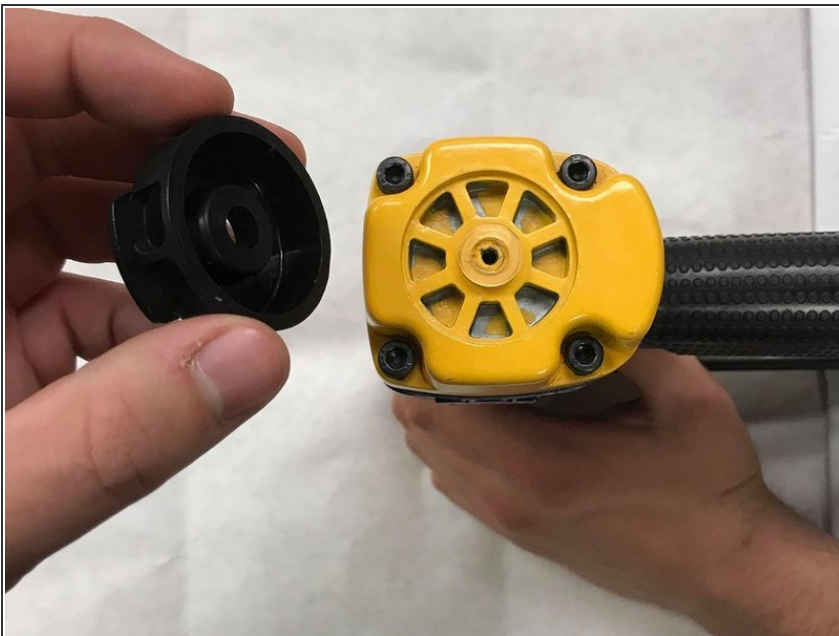

- Remove the knob from the gun and replace the knob.
- ☑ Be aware of the rubber spacer that will come off with the knob; when you replace the knob put the spacer back in the middle around the screw hole.

To reassemble your device, follow these instructions in reverse order.