




Kyocera Hydro Life Rear-Facing Camera Replacement

A step-by-step rear camera replacement guide for the Kyocera Hydro Life smartphone.

Written By: Morgan Marshall

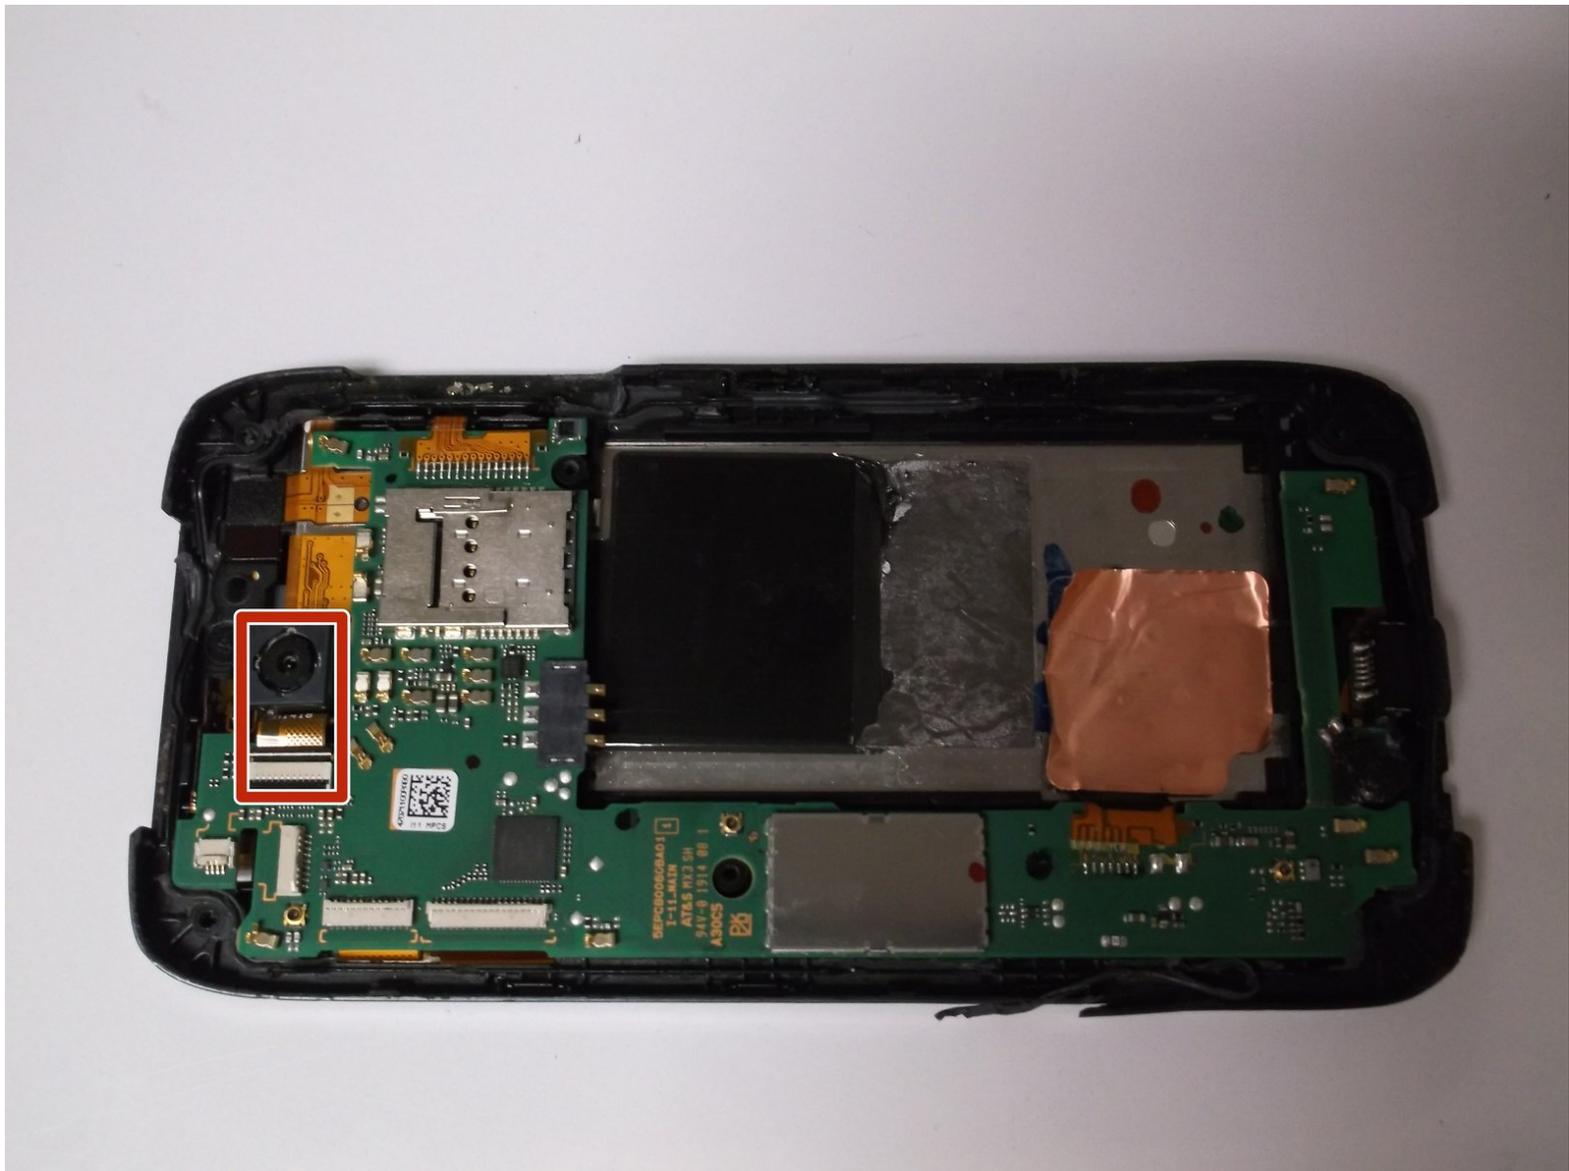

INTRODUCTION

A step-by-step rear camera replacement guide for the Kyocera Hydro Life smartphone.

TOOLS:

- [Eyeglasses Repair Kit Screwdriver Size #00](#)
(1)
 - [Prying and Opening Tool Assortment](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Rear-Facing Camera



- Flip the phone so that the screen is facing down.
- Gently remove the back cover with the grip at the bottom of the phone.

Step 2



- Use the tab marked "PULL" to remove the battery from its enclosure.

Step 3



- Remove the six Phillips #00 screws from the back of the enclosure.
- Use a plastic opening tool to gently remove the plastic piece surrounding the back of the phone enclosure.

Step 4




- Remove the white sticker.

Step 5




- Using a pair of pliers, gently pry open the camera ribbon slot.
- ⓘ This will not take much pressure to open.

Step 6

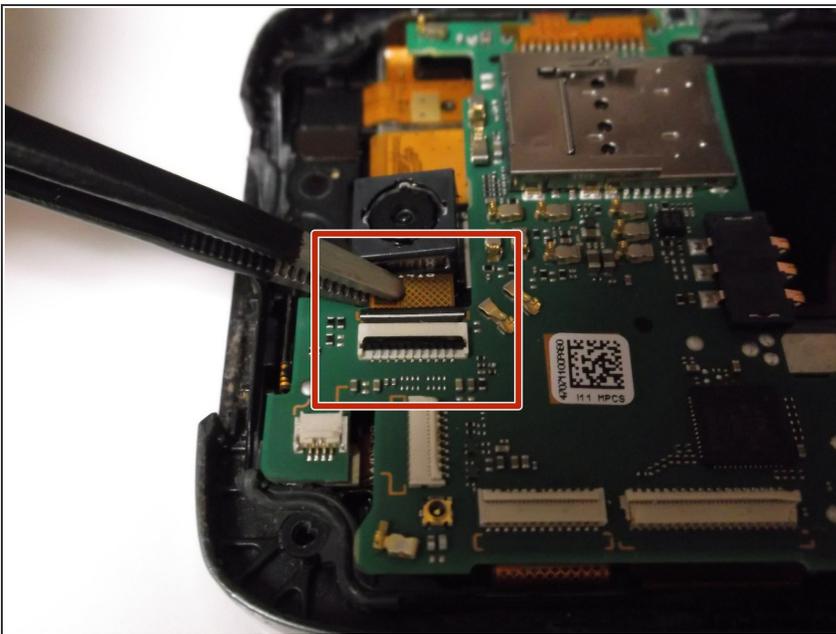


- Gently remove the camera ribbon.
- ⓘ Be very careful not to rip the ribbon. Use tweezers if needed.

Step 7

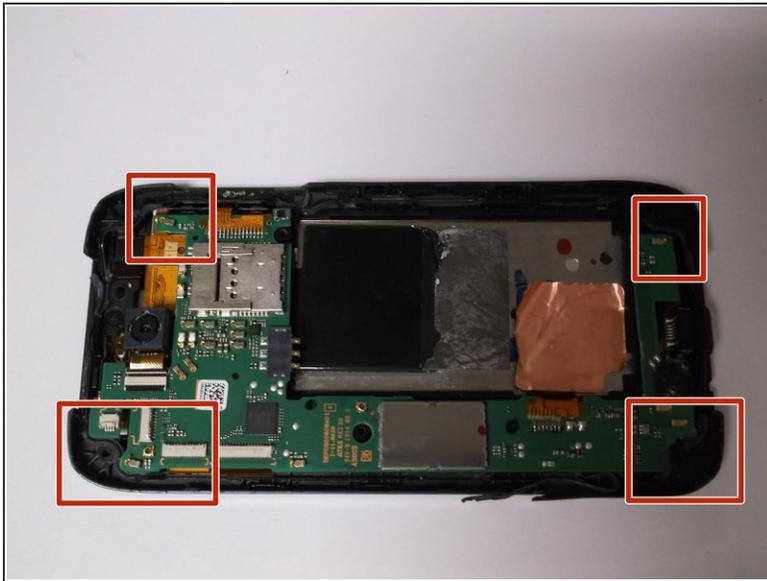

- Using a plastic prying tool, gently loosen all 4 corners of the motherboard.
- Lift the motherboard away from the phone enclosure.

Step 8

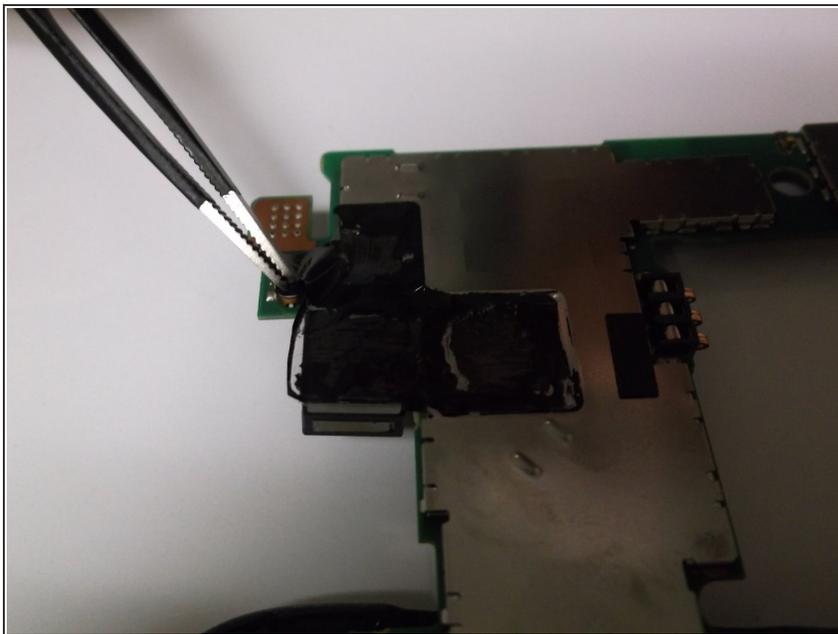

- Remove the black sticker.
- ⚠ Be careful when removing the sticker. The sticker will need to be replaced after replacing the camera.

Step 9



- Remove the camera from the motherboard.
- ⚠ This step requires breaking metal.
- ⓘ Only cut along the camera square.

To reassemble your device, follow these instructions in reverse order.