



Huawei Y300 Charging Port Replacement

This guide will show how to remove the charging port for replacement in your Huawei Y300.

Written By: Alec Schory



INTRODUCTION

In this guide we are going to replace the charging port on the Huawei ascend Y300 android smartphone. Before starting, it is a good idea to prepare an organized area to carry out the repair. It is also helpful to have a way of containing loose screws so they do not become lost. In addition, this guide requires soldering, a “How To” guide is included.

TOOLS:

- [T4 Torx Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Soldering Iron](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Charging Port




- Remove the back plate by hand. There is a small indent on the bottom of the phone to pry open.

Step 2



- Lift up and remove the battery.

Step 3

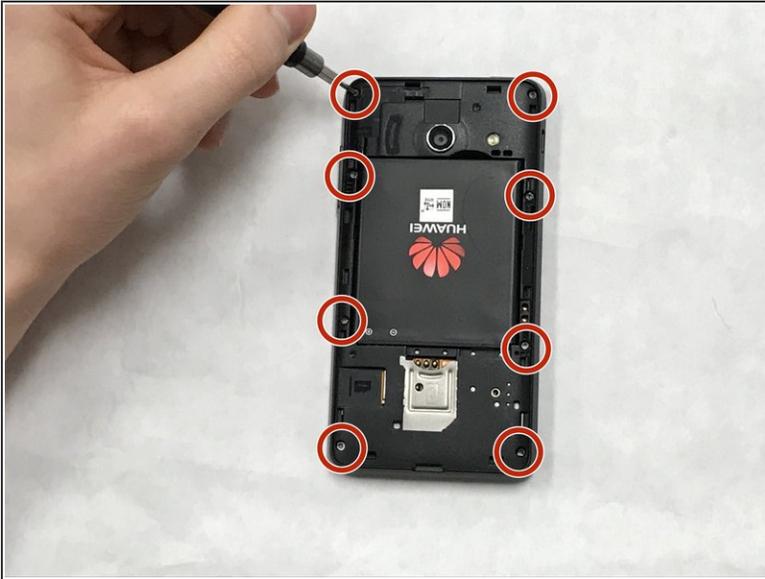

- Use a T4 Torx screwdriver to remove the 8 screws along the outer edge of the case.

Step 4



- Using the plastic opening tool, pry the screen from the casing. Insert the tool between the case and screen to pry the pieces apart.

☞ Take care to not damage the screen or case.

Step 5



- Use a soldering iron to desolder the four connections to the charging port.
- ⓘ For information regarding how to properly solder, click the following link. [How To Solder and Desolder Connections.](#)

To reassemble your device, follow these instructions in reverse order.