




Dell XPS 15 9530 Touch Pad Replacement

Removal of the touch pad will be covered in...

Written By: Larissa Omura

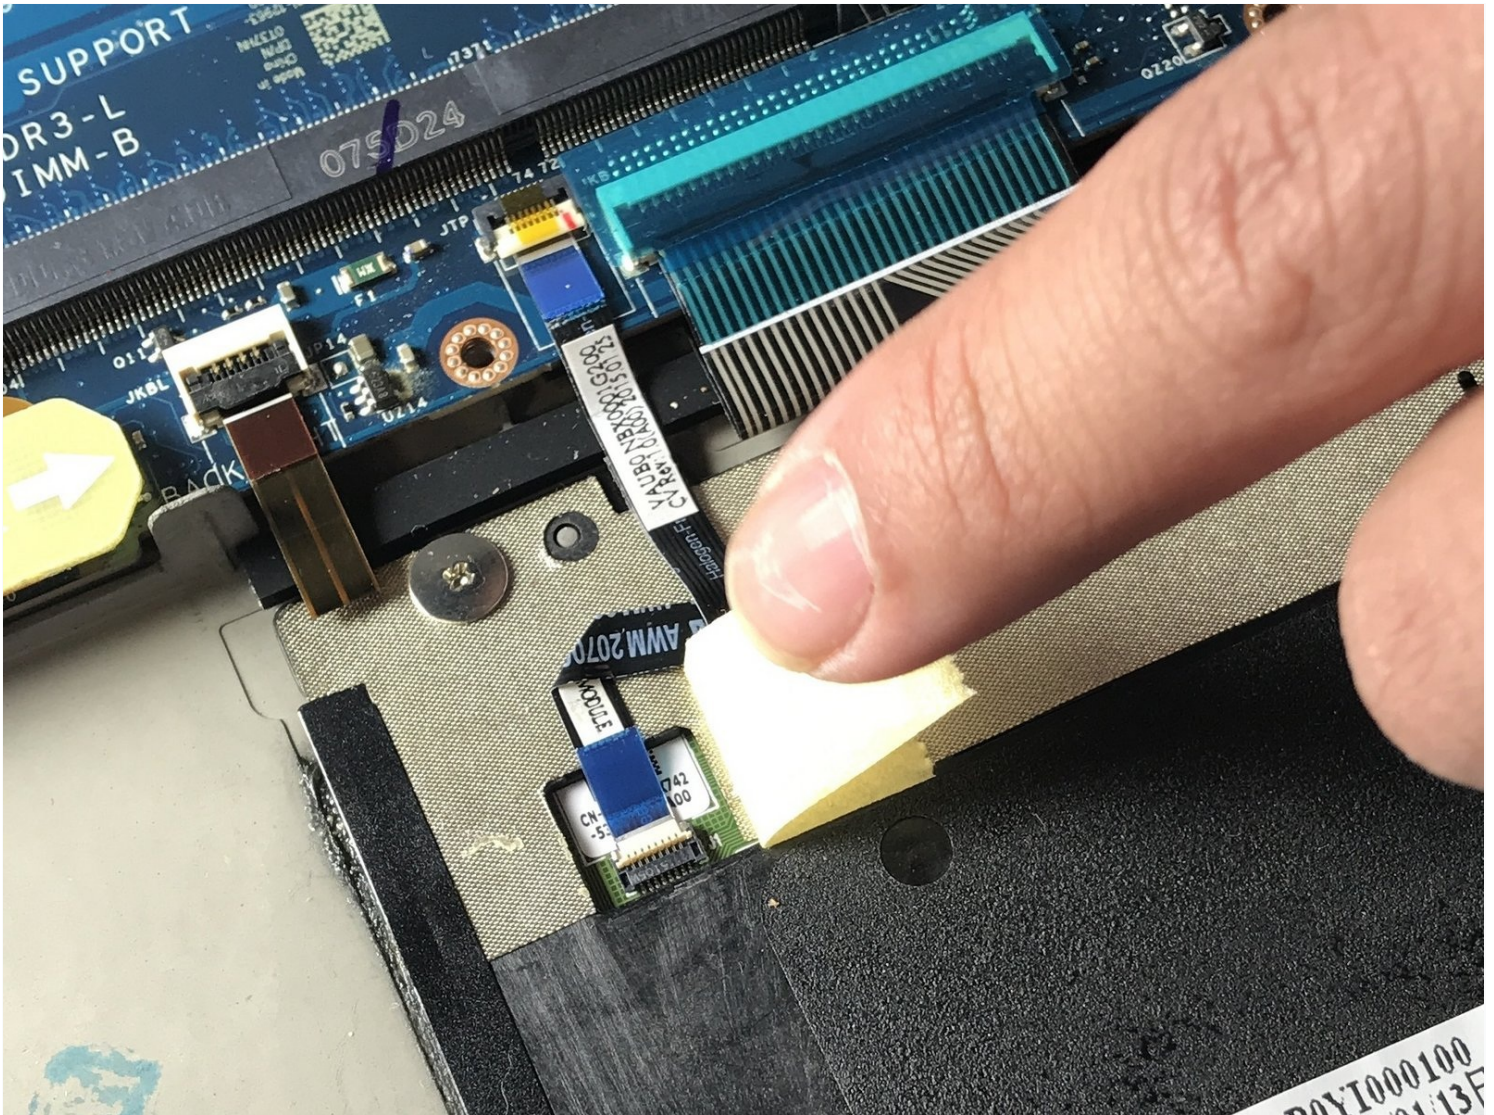

INTRODUCTION

Removal of the touch pad will be covered in this guide. To successfully remove the battery, a #0 Phillips screwdriver, a T5 Torx screwdriver, and a plastic spudger are needed. Be careful disconnecting cables as to not break them or their connectors.


TOOLS:

T5 Torx Screwdriver (1)

Spudger (1)


Phillips #0 Screwdriver (1)

Step 1 — Battery

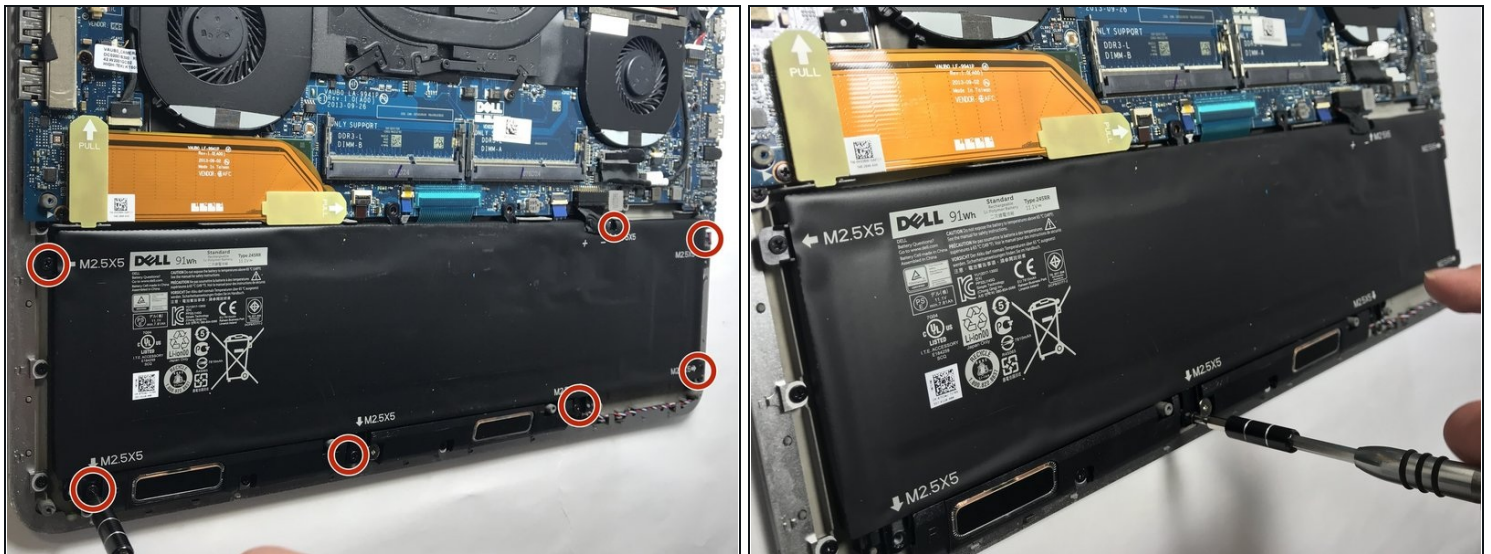

- Using a Phillips #0 screwdriver, remove the seven 3.5mm screws that secure the battery to the palm rest assembly.


Step 2

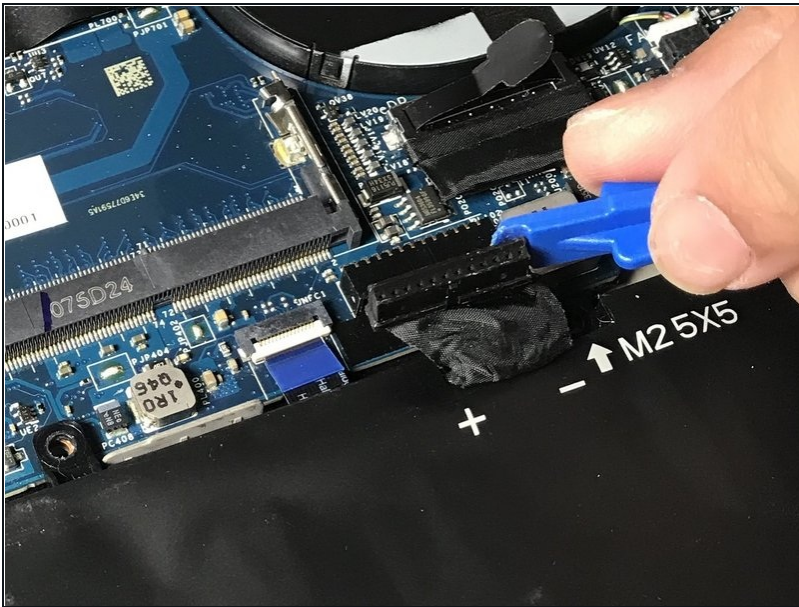

- Disconnect the battery cable from the system board.


⚠ Be sure to use a plastic tool, not a metal one.

Step 3

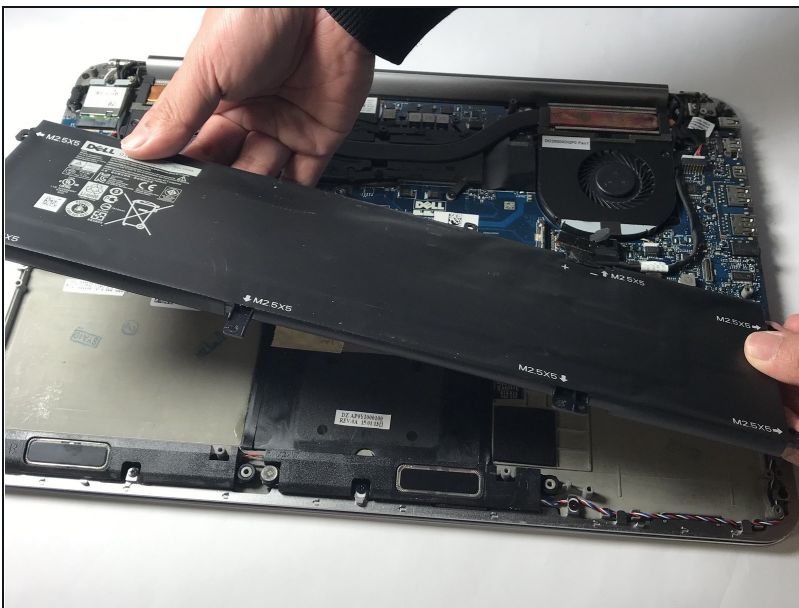


- Lift the battery off the chassis.

Step 4 — Touch Pad

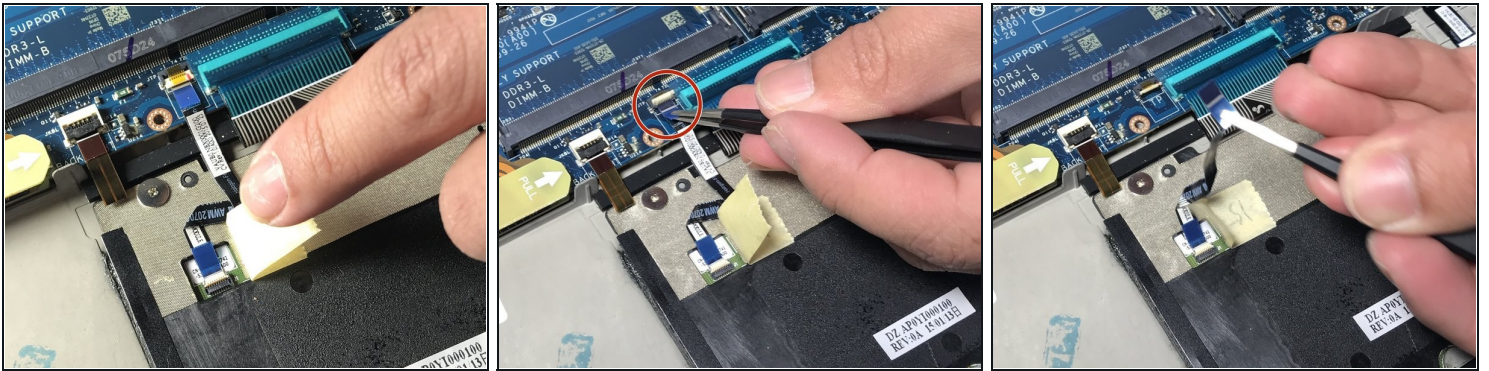




- Remove the touch pad ribbon cable by lifting the small plastic flap and pulling ribbon straight out of the connector.

Step 5

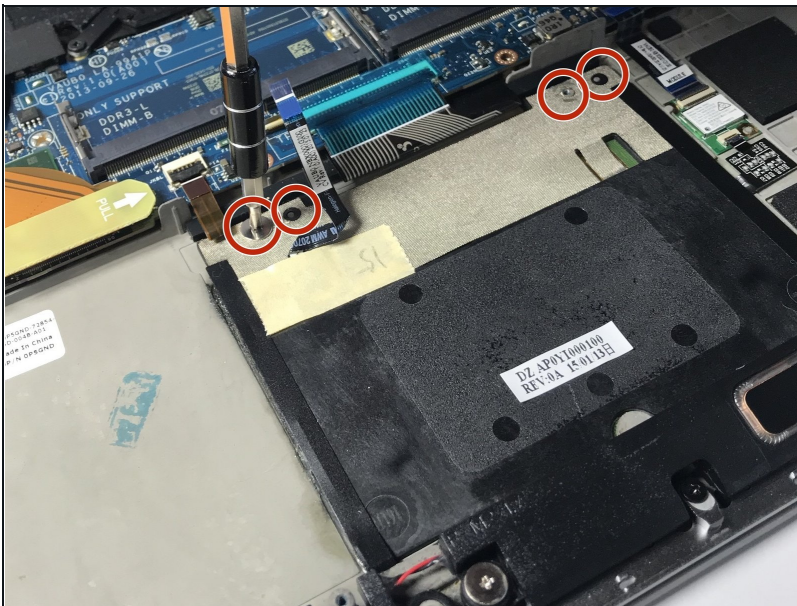

- Using a Phillips #0 screwdriver, remove the four 3mm screws holding in the touchpad assembly.

Step 6

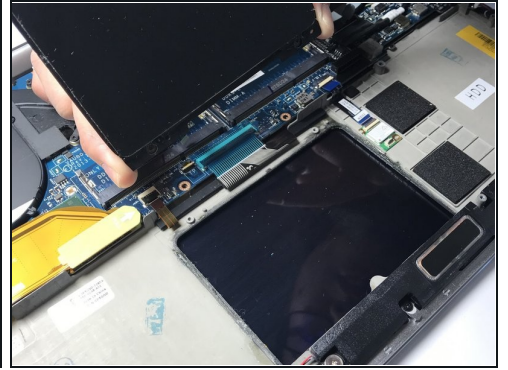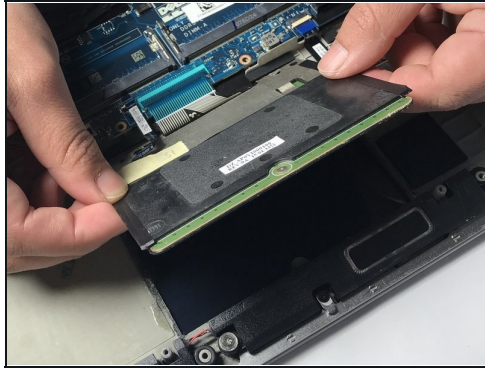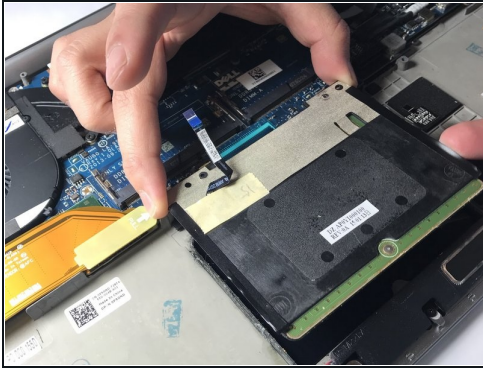

- Lift the bottom of the touchpad and pull directly out.

To reassemble your device, follow these instructions in reverse order.