



Canon Eos 5d Mark II Clock Battery Replacement

This is a simple short step-by-step to replace the date and time battery in the 5D2. Most people will only run into this problem after long-term not-using the camera w/o leaving an operation battery in it.

Written By: Hans Bruch jr



INTRODUCTION

Hi!

This is certainly a job you can do yourself, and it doesn't break any seal so it's even warranty-safe.

Just make sure you use a screwdriver that fits perfectly! otherwise you'll end up damaging those little screws.



TOOLS:

- [Essential Electronics Toolkit](#) (1)

Step 1 — Clock Battery




- undo screw near the letter 'o' from 'open' that's indicated on the bottom left of the camera

Step 2



- Undo screw as indicated by the red arrow.
- for this, you need to lift the rubber covers over the data connectors

Step 3

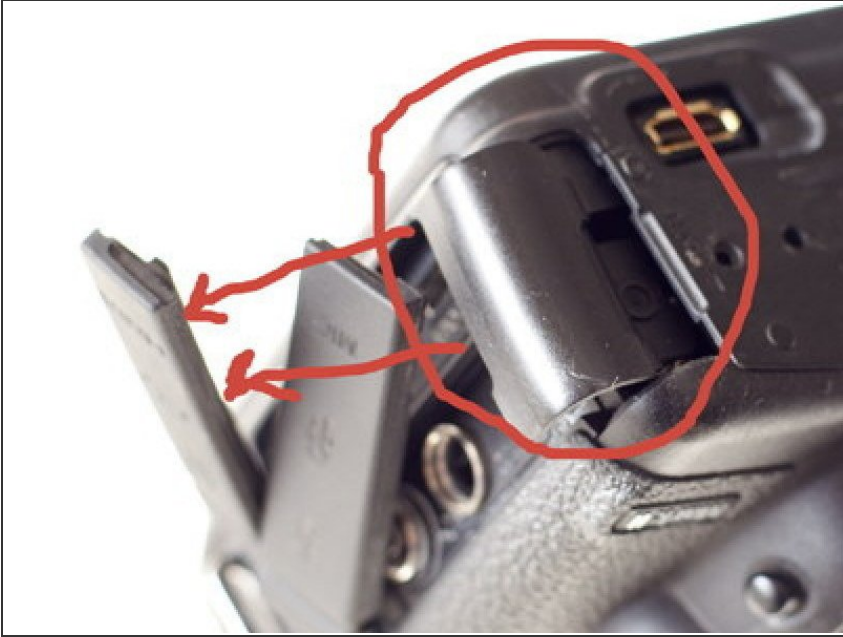

- now you can simply slide out the carrier for the 'Date & Time Battery'

Step 4



- now you have access to the battery.
- The type is CR1616, 3V , lithium type, original brand as supplied by canon is Maxell.
- Battery goes in with the +positive side down (as pictured)

To reassemble your device, follow these instructions in reverse order.