



HP Pavilion 15-ba003ds Backplate Replacement

How to replace a backplate on a HP Pavilion 15-ba003ds.

Written By: Krushnam Badami



INTRODUCTION

This guide will detail how you can get into the HP Pavilion 15-ba003ds by providing you the steps to follow in order to safely remove the back plate from your laptop. This guide may be of use to you should you need to have access to the internal components of your laptop for any repair, replacements, or cleaning of the laptop.



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [Jimmy](#) (1)
-

Step 1 — Battery




- Unplug the AC adapter from the corresponding socket in the laptop.
- ⚠ Turn off your laptop before starting this procedure. Make sure it's not in sleep or hibernation mode.
- Use your fingers to push the slider located just under the battery on either side to unlock the battery from the laptop.
- Carefully slide the battery out of the laptop frame and place it somewhere safe.

Step 2 — Disc Drive




- Remove the two rubber feet next to the battery.

Step 3

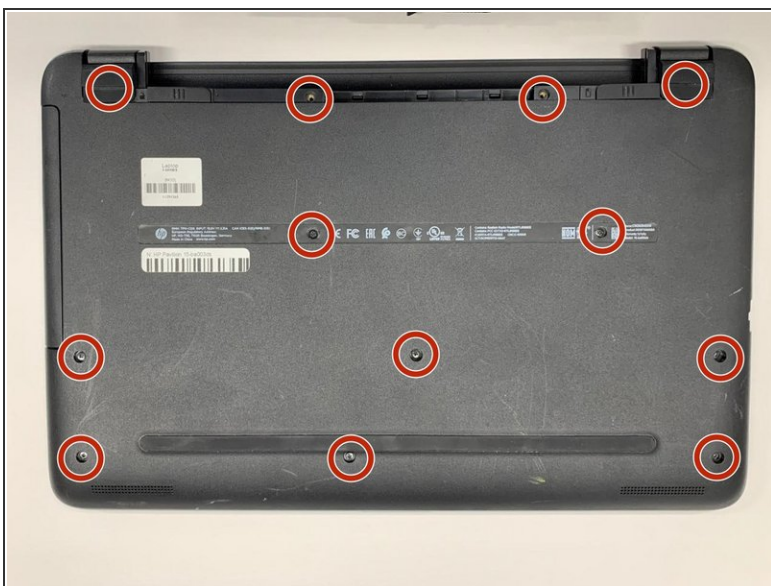

- Remove twelve 8mm Phillips #00 screws including two underneath the rubber feet.

Step 4

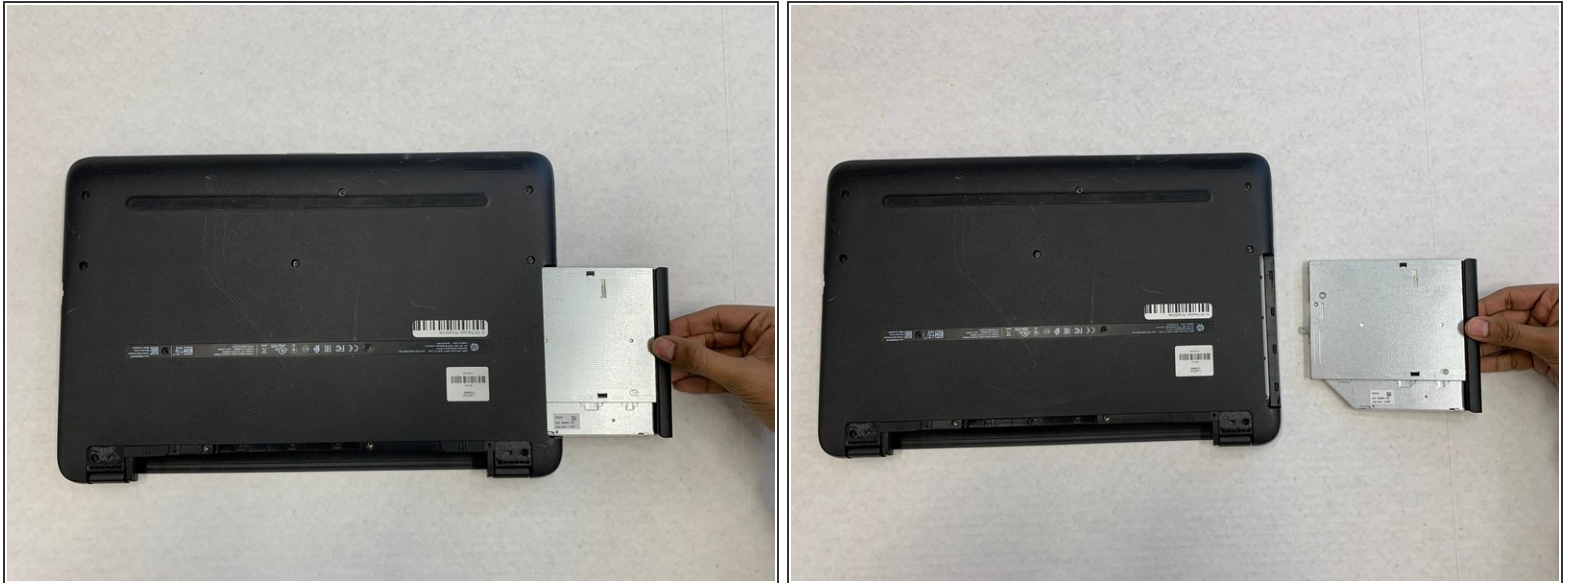

- Pull out the disc drive by hand.

Step 5 — Backplate



- Use a Jimmy to pry off the black backplate.

To reassemble your device, follow these instructions in reverse order.