




Motorola i560 Motherboard Replacement

How to remove the motherboard of the Motorola i560.

Written By: Ariel

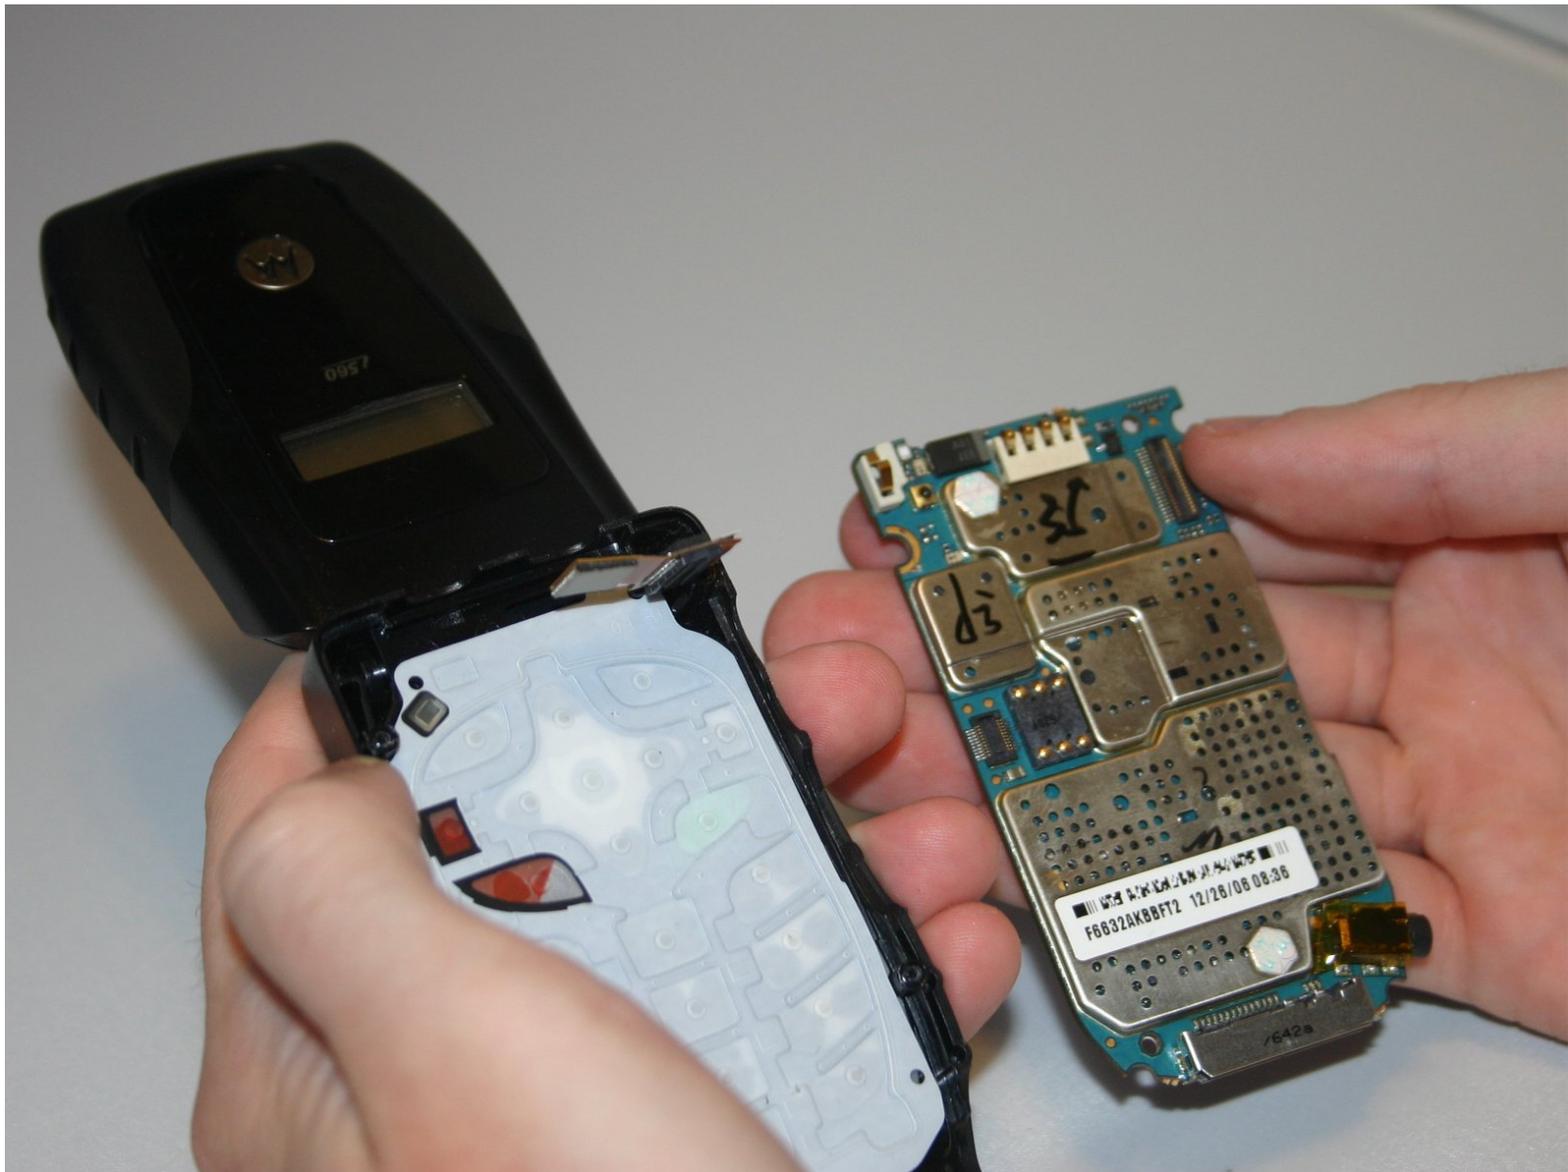

INTRODUCTION

This guide will install the motherboard, which will require removal of the battery and disconnection of the speaker and microphone ribbon cables.

TOOLS:

- [T6 Torx Screwdriver](#) (1)
-

Step 1 — Battery




- Place thumb on the rubber tab on the lower back of the phone.
- Push away from the phone to release back panel.

Step 2




- Lift the back panel of the phone to expose battery (not shown here).

Step 3 — Motherboard

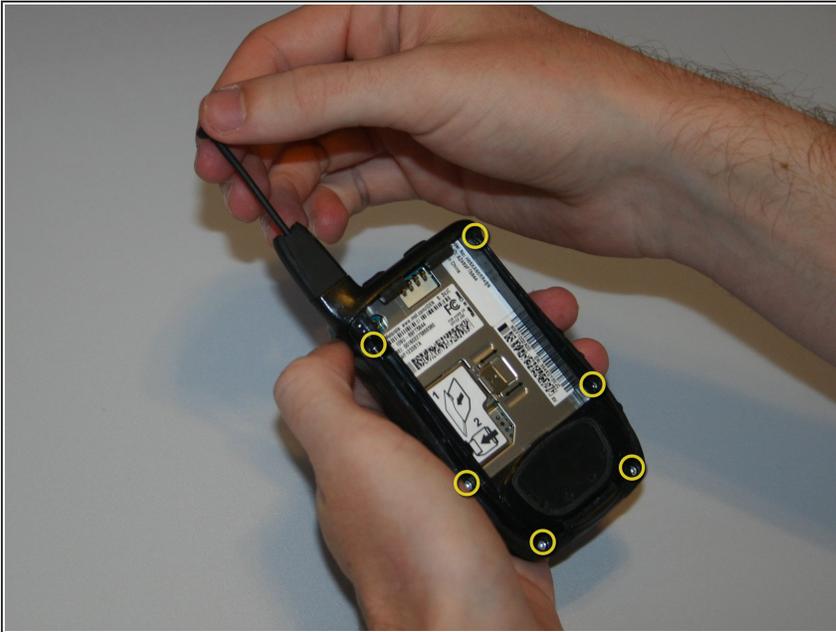

- Pull the antenna up to reveal two of the six screws.

Step 4

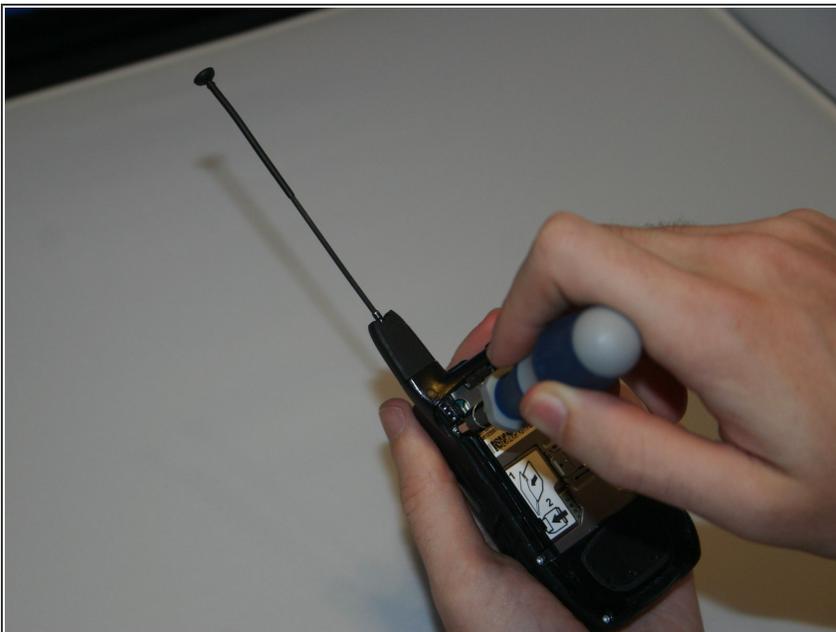

- Unscrew all six screws on the back side of the phone using a T-6 bit.


Step 5



- Gently separate the front and back sides of the phone, as shown in the picture.



⚠ Be careful not to break or bend the ribbon cables.

Step 6

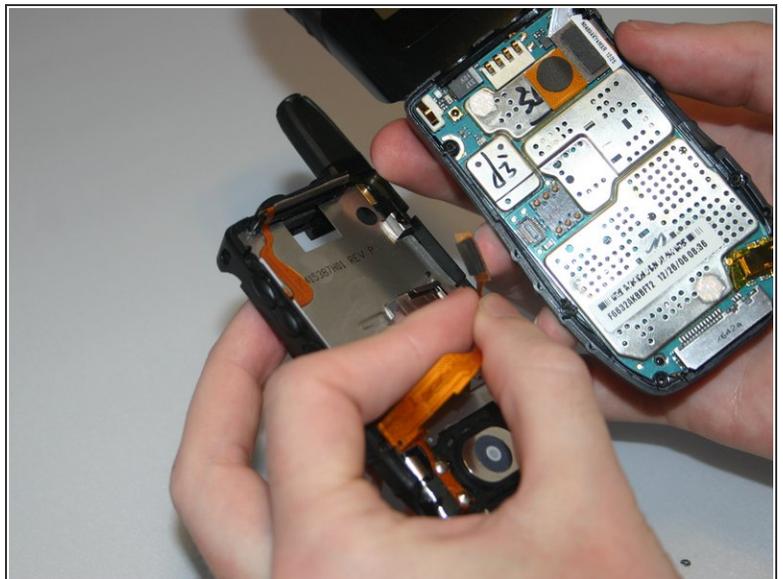


- Detach the first ribbon cable by unplugging it from the motherboard.

Step 7

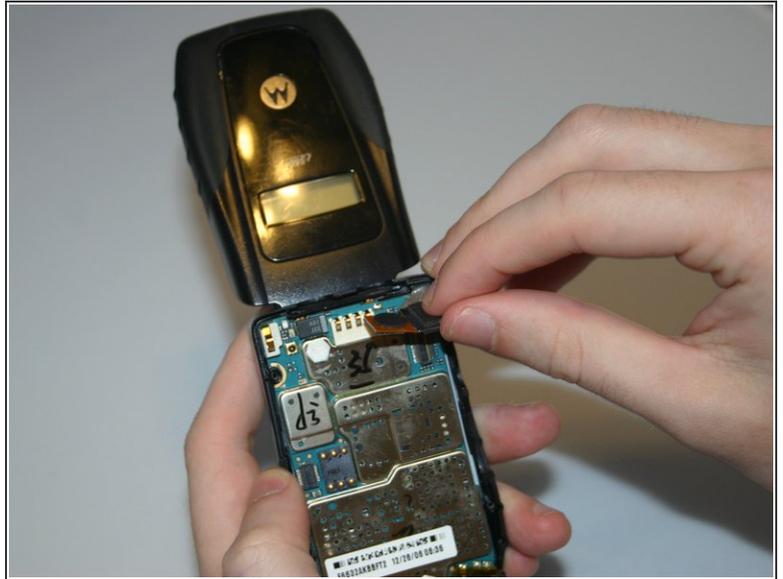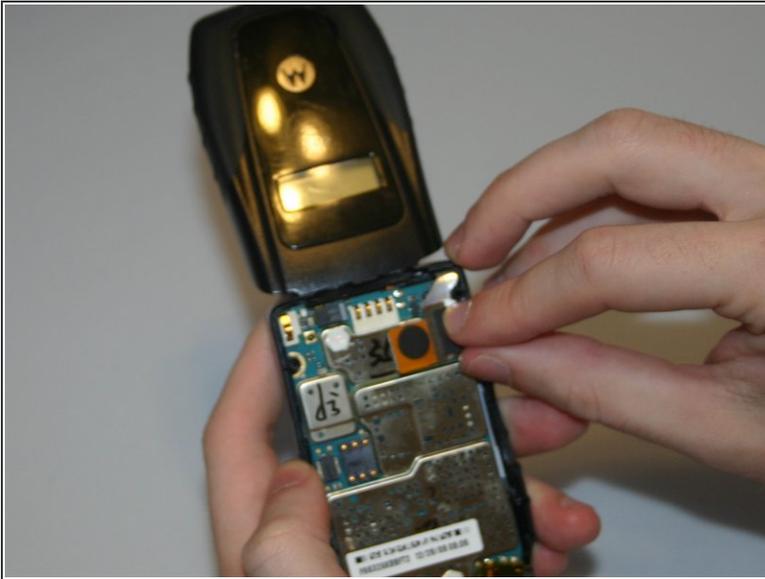

- Detach the speaker ribbon cable from the motherboard.

Step 8

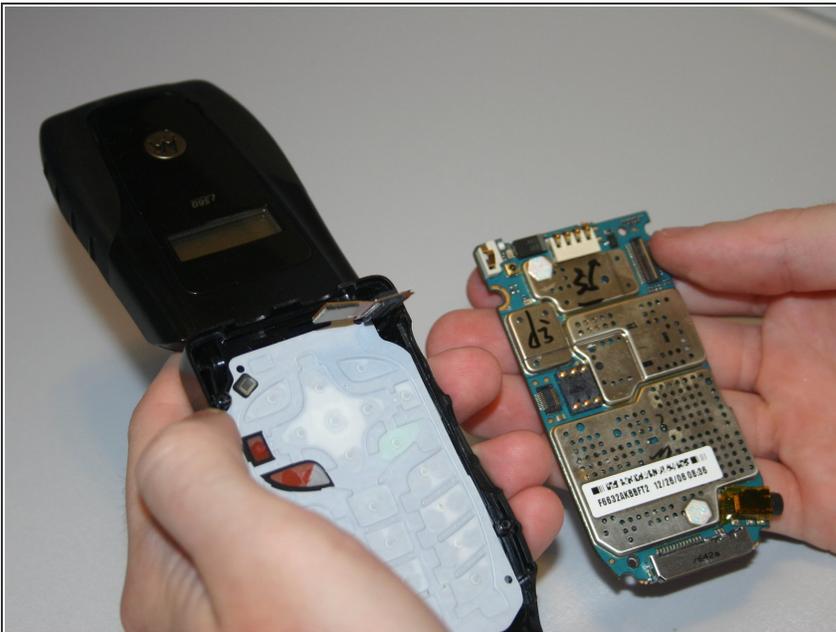

- Remove the motherboard from the front half of the phone by gently shaking it loose. It should come out with little to no trouble.

To reassemble your device, follow these instructions in reverse order.