

Motorola V551 Earpiece Speaker Replacement

This guide is for removing the phone's earpiece...

Written By: gregatron



INTRODUCTION

This guide is for removing the phone's earpiece speaker.

TOOLS:

[Outil pour ouvrir iFixit](#) (1)

[Spudger \(spatule antistatique\)](#) (1)

[Tournevis Torx T6](#) (1)

Step 1 — Screen



- On the phone's face, remove the four rubber caps from the screw covers using a [spudger](#).

Step 2



- Unscrew the four cover screws using a T6 Torx screwdriver, turning counterclockwise.

Step 3




- Loosen and remove the protective cover using a plastic opening tool.

Step 4





- Gently loosen the second protective cover with the plastic opening tool.

Step 5

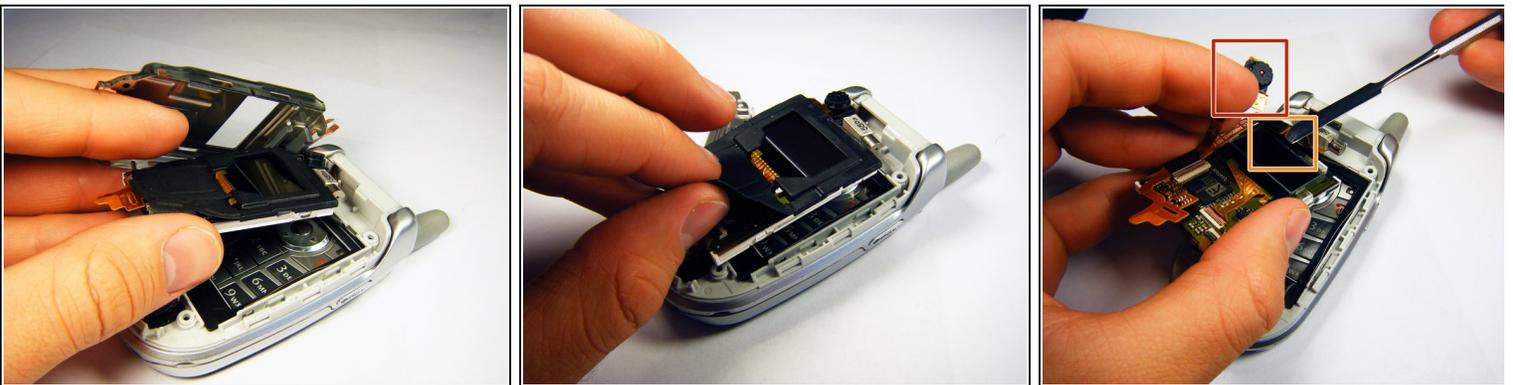


- Carefully remove the protective cover from the circuitry.
- Slowly peel the black rubber gasket off of the circuit board.
- Carefully move the camera out of the way using your hand.
- Use a flat tool to disconnect the upper and lower circuit boards.

Step 6

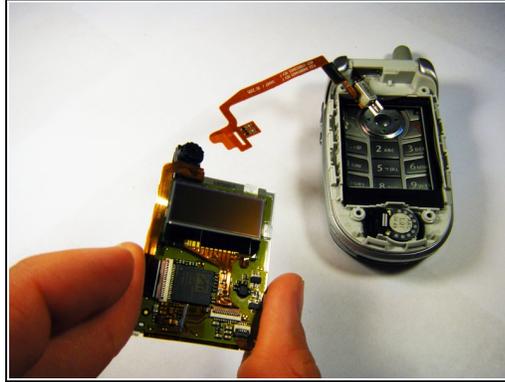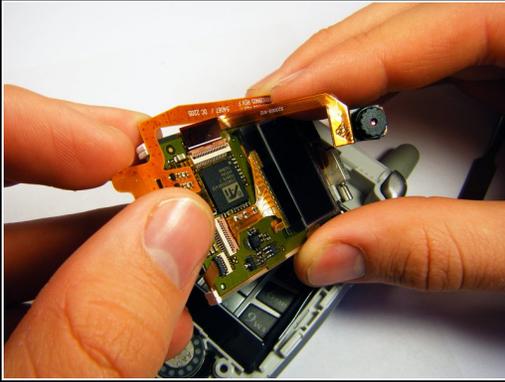

- Gently slip the copper strip out from under the circuitry by using your hand.

Step 7 — Earpiece Speaker

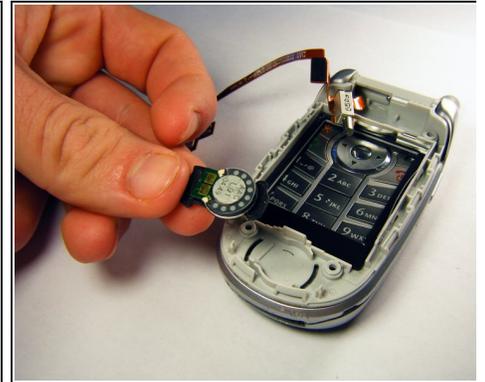

- Pry out the speaker using your fingers.

To reassemble your device, follow these instructions in reverse order.