



JBL Go Woofer Replacement

This guide will take you through the steps to remove and replace the woofer from your JBL Go.

Written By: Sydney Jason



INTRODUCTION

If your JBL Go isn't producing quality sound, the woofer may be damaged. Use this guide to carefully remove and replace the faulty woofer.



TOOLS:

- [iFixit Opening Tool](#) (1)
 - [T6 Torx Screwdriver](#) (1)
-

Step 1 — Front Cover



- Use an opening tool to scrape around the outside of the front cover to remove the glue attaching it to the surrounding rubber layer.

Step 2




- Once you have scraped off all of the glue, use the opening tool to pry up the front cover.

Step 3



- Carefully remove the loose plastic cover from the speaker.

Step 4 — Woofer

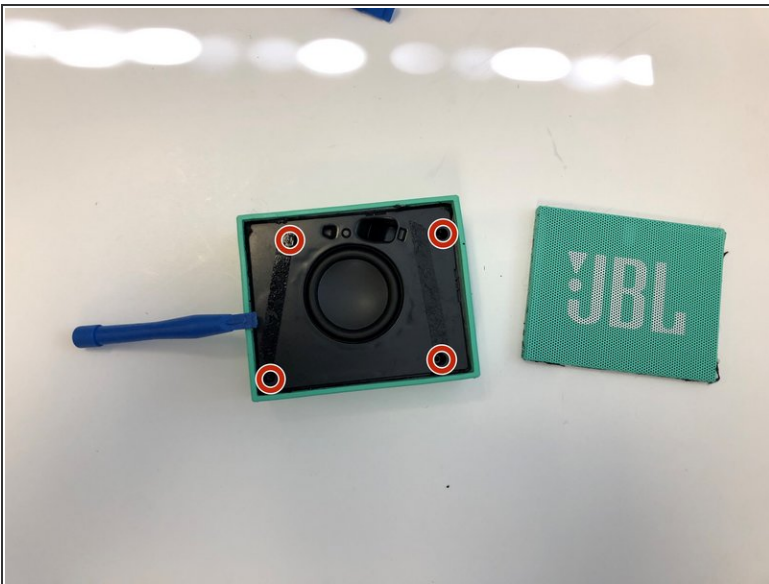

- Once the front cover is removed, use a T6 screwdriver head to remove the four 9 mm screws on the black cover.

Step 5




- After removing the screws, use the plastic opening tool to carefully pry around the edges of the black cover to loosen and lift the cover off of the device.

Step 6



- Carefully unplug the woofer wires from the motherboard

Step 7

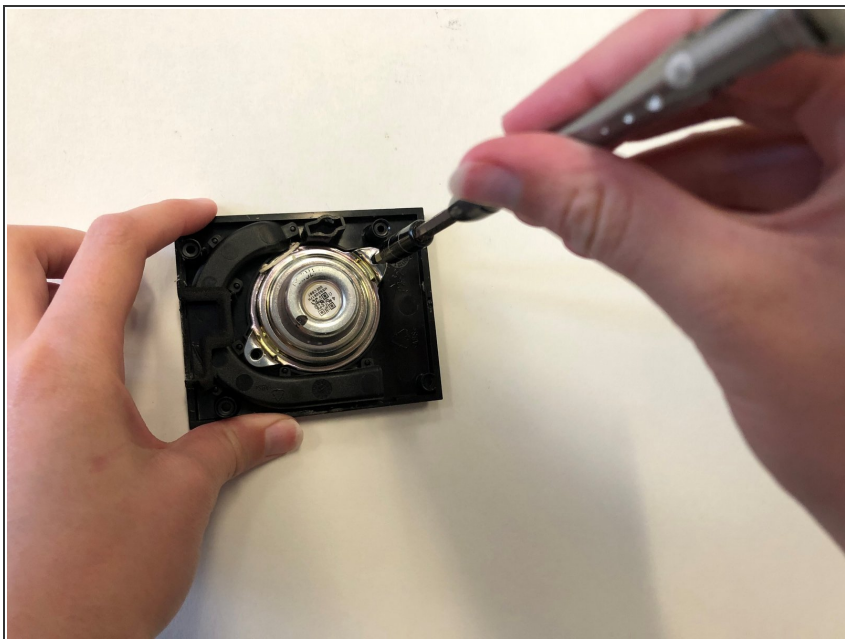

- Once the black cover is fully detached from the speaker, unscrew the woofer from the back of the black cover using a T6 screwdriver head.

To reassemble your device, follow these instructions in reverse order.