



JBL Go Repair Foam Surround Replacement

This guide will take you through the steps to remove and replace the foam surround of your JBL Go.

Written By: Sydney Jason



INTRODUCTION

If your JBL Go is producing distorted audio, the foam surrounding the woofer may be damaged. Use this guide to remove and replace the foam surround.

Removing the foam surround requires sharp tweezers so perform this step delicately to avoid cutting yourself.

TOOLS:

- [T6 Drillbit](#) (1)
 - [iFixit Opening Tool](#) (1)
 - [Sharp tip tweezers](#) (1)
-

Step 1 — Front Cover



- Use an opening tool to scrape around the outside of the front cover to remove the glue attaching it to the surrounding rubber layer.

Step 2




- Once you have scraped off all of the glue, use the opening tool to pry up the front cover.

Step 3



- Carefully remove the loose plastic cover from the speaker.

Step 4 — Woofer

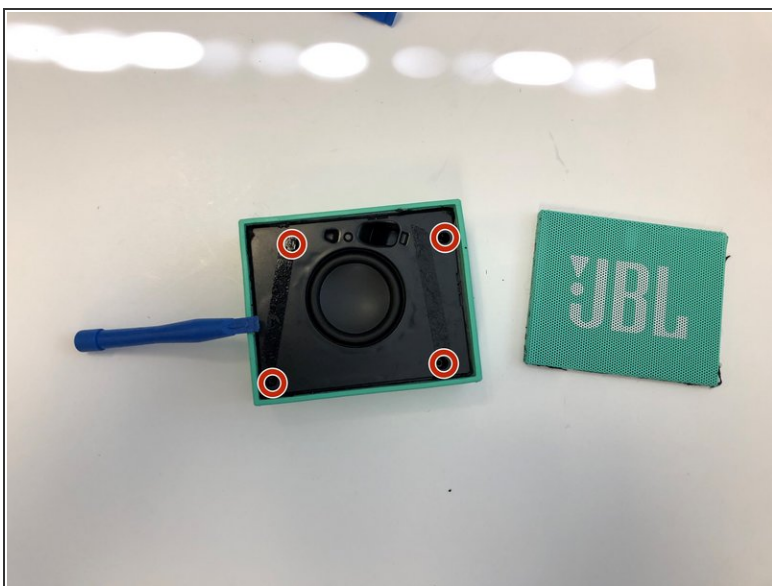

- Once the front cover is removed, use a T6 screwdriver head to remove the four 9 mm screws on the black cover.

Step 5




- After removing the screws, use the plastic opening tool to carefully pry around the edges of the black cover to loosen and lift the cover off of the device.

Step 6



- Carefully unplug the woofer wires from the motherboard

Step 7

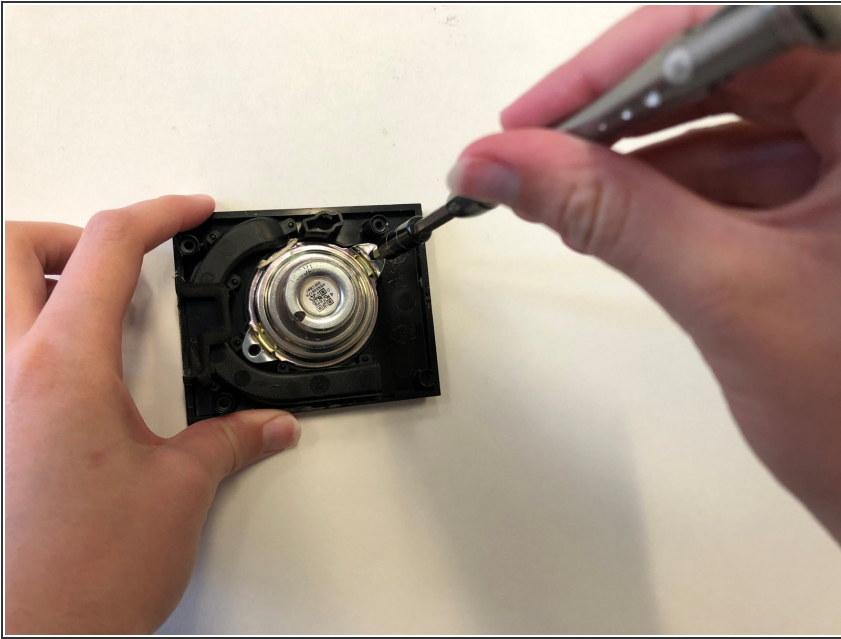

- Once the black cover is fully detached from the speaker, unscrew the woofer from the back of the black cover using a T6 screwdriver head.

Step 8 — Foam Surround



- Once the woofer is removed, use sharp tweezers to carefully remove the foam surround from the woofer.

To reassemble your device, follow these instructions in reverse order.