



Keyboard replacement on a why! W253EU

Written By: Felice Suglia






TOOLS:


- [Phillips #1 Screwdriver](#) (1)
-

Step 1 — Battery from why! Remove W253EU

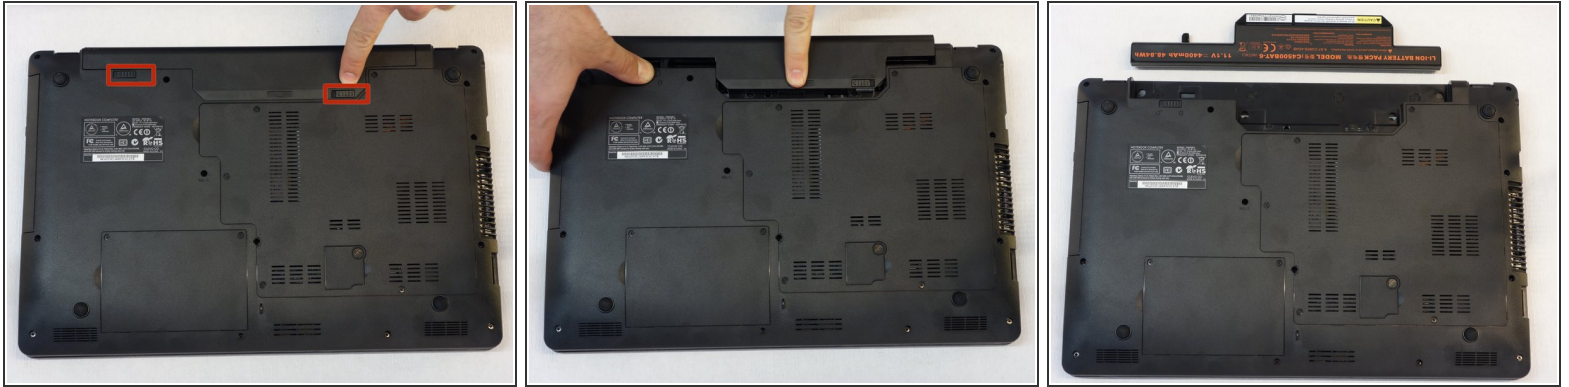


- Turn off the computer.
- ⓘ Before each operation it is important to start with the removal of the accumulator.
- Take the slide unlocked into position, remove the battery.

Step 2 — Keyboard

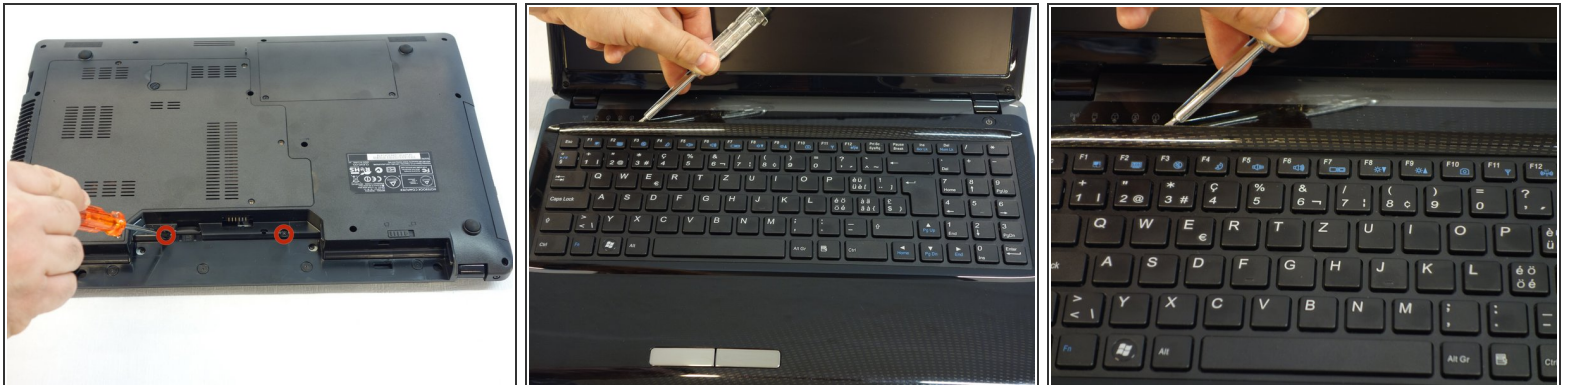


- Use a Phillips # 1 screwdriver to remove the two screws located in the slot of the accumulator.
- Insert a standard screwdriver into the slot in the cover above the keyboard.
- Lift the cover with the usual care.

Step 3

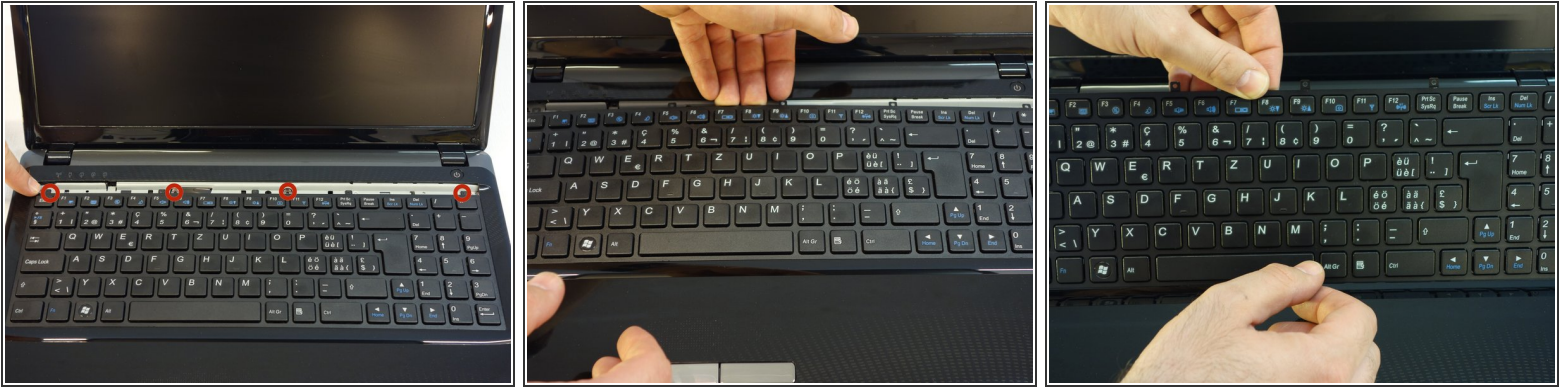

- Use a Phillips # 1 screwdriver to remove the four screws securing the keyboard in the upper part.

Step 4

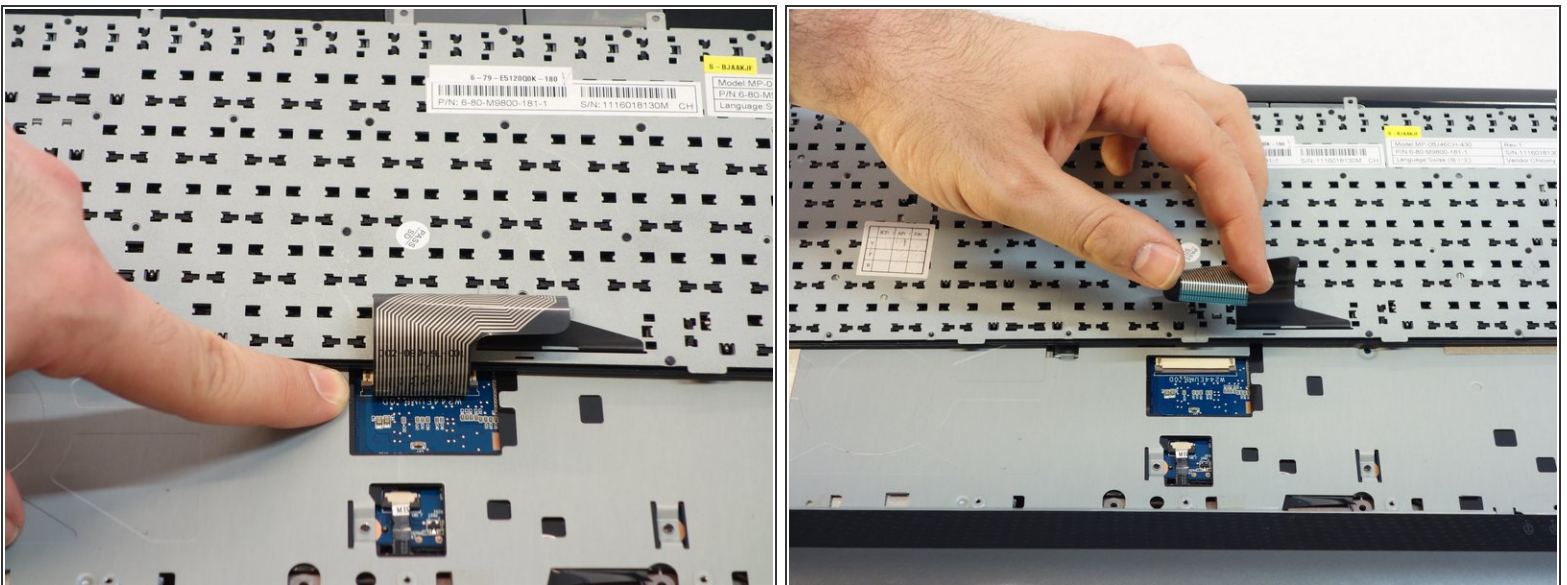

- Turn the keyboard towards the screen.
- Carefully remove the connection cable in the direction of the plug axis.

For reassembly, follow the instructions in reverse order.