



# Toshiba Satellite A65-S126 Keyboard Replacement

Replace a broken keyboard on the Toshiba Satellite A65-S126

Written By: Aditya Varkhedi



---

## INTRODUCTION

This guide provides step by step instructions of how to replace a faulty keyboard.

---

### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
-

## Step 1 — Battery



- Flip the laptop over so the bottom is facing up.
- Slide each of the three tabs on the bottom half of the assembly into the unlocked position.

## Step 2




- Gently lift the battery out of the computer.

### Step 3 — Upper Assembly



- Remove the single 3mm Phillips #00 screw that secures the wireless card cover.

### Step 4

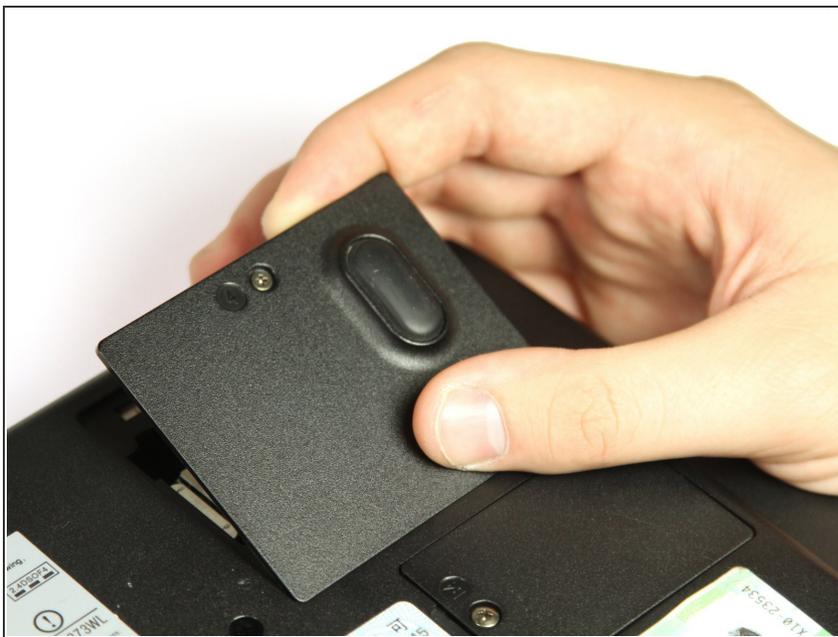

- Remove the WiFi module cover. It will pull right off.

## Step 5



- Unplug the white and black wires from the WiFi module.

## Step 6



- Remove the twelve 8mm button head Phillips #00 B8 screws.
- Remove the two 14 mm button head Phillips #00 B14 screws.
- Remove the two 10 mm Phillips #00 battery compartment screws.
- Remove the two 8 mm Phillips #00 screws.

## Step 7




- Remove the seven 4mm flat Phillips #00 screws.
- Remove the seven 20mm button head Phillips #00 screws.

## Step 8



- Use the plastic opening tool to pry the two halves apart.

## Step 9 — Keyboard

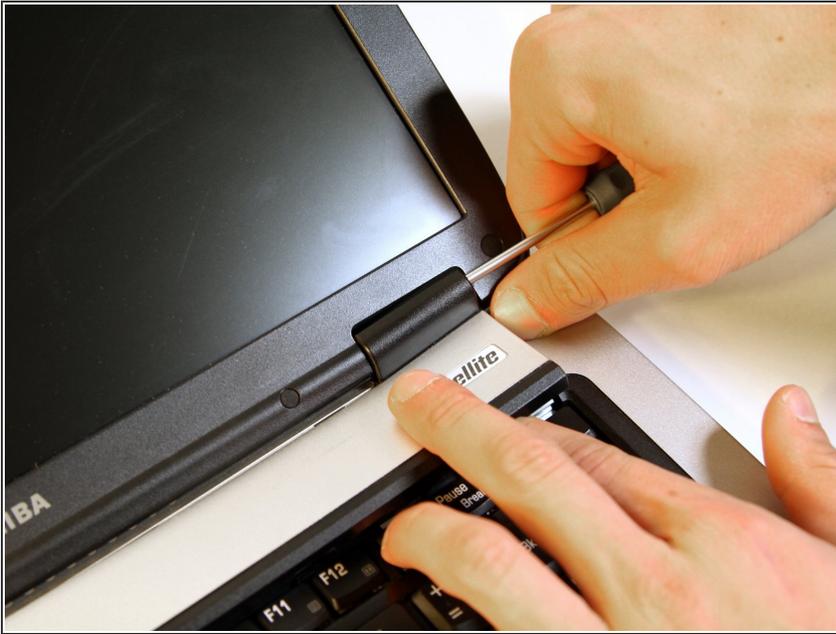

- Using a screw driver for assistance, pop open the plastic cover and snap it off of the hinges. Repeat on the opposite side.

## Step 10



- Remove the two 3mm Phillips #00 screws.

## Step 11



- Slide keyboard out and away from the upper assembly.

To reassemble your device, follow these instructions in reverse order.