




# Circuit Board Housing Removal

Use this guide in order to remove the housing...

Written By: Jonathan Flowers

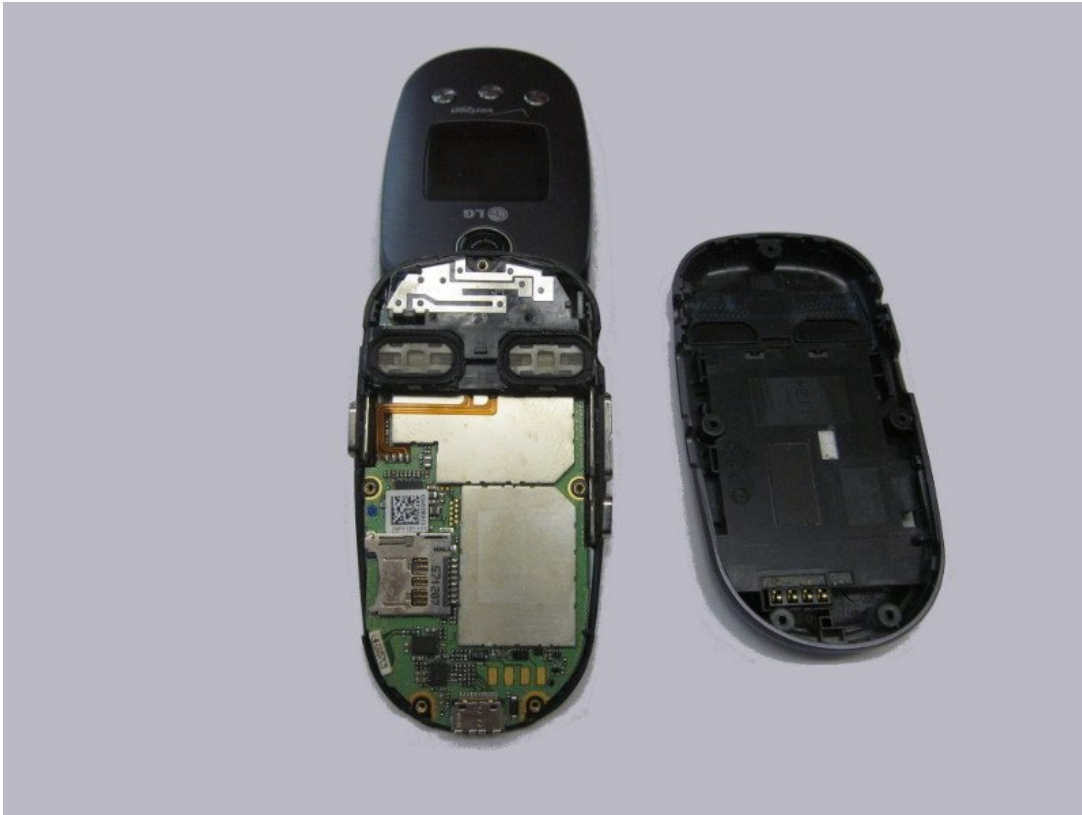

# INTRODUCTION

Use this guide in order to remove the housing of the phone.

---

## TOOLS:

[iFixit Opening Tool](#) (1)

[Phillips #0 Screwdriver](#) (1)

[Tweezers](#) (1)

---

## Step 1 — Battery



- Locate the horizontal grip located on the back cover of the phone.
- Slide the back cover down and off of the phone.

## Step 2




- Insert a plastic opening tool into the battery release point located above the battery.
- Pull outwards in order to release the battery.

## Step 3 — Circuit Board Housing





- Locate the 5 screws holding the body of the phone together.
- ① The top screw will have a plastic cover, remove it using [tweezers](#).
- Using a Philips head screwdriver, twist counterclockwise to remove the screws.
- Take special care with the screw located at the top of the phone. It is smaller and more likely to be damaged or improperly attached.

## Step 4

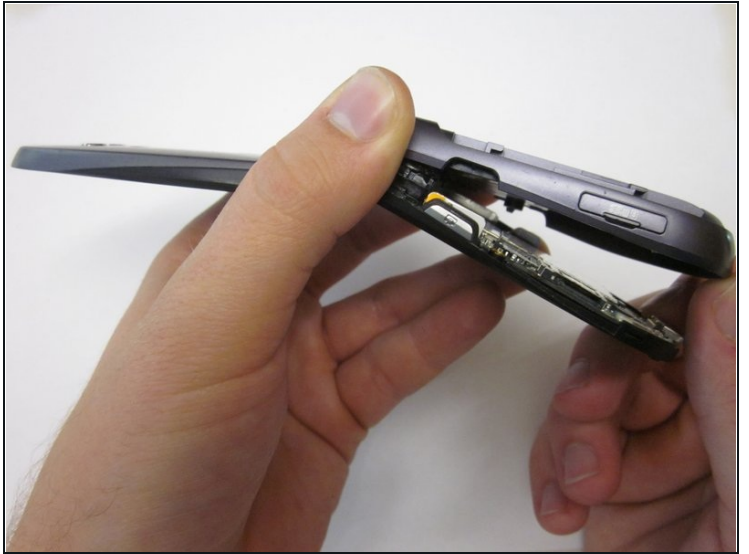

- Lift the back cover starting at the bottom of the phone.

## Step 5

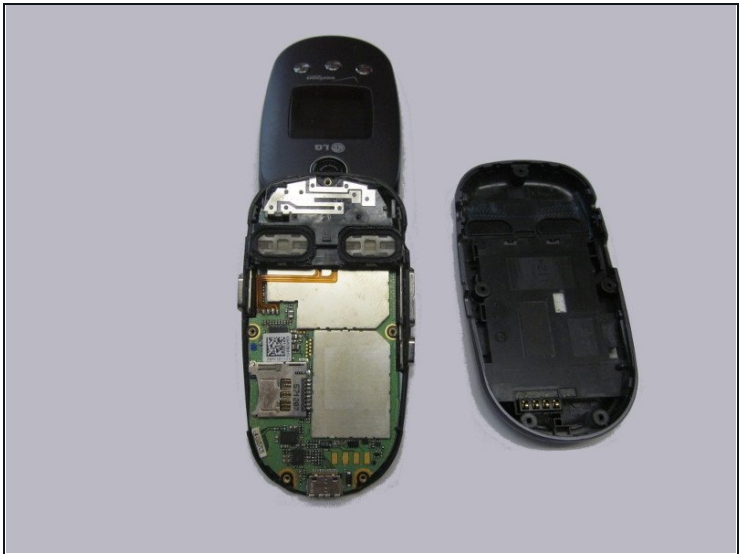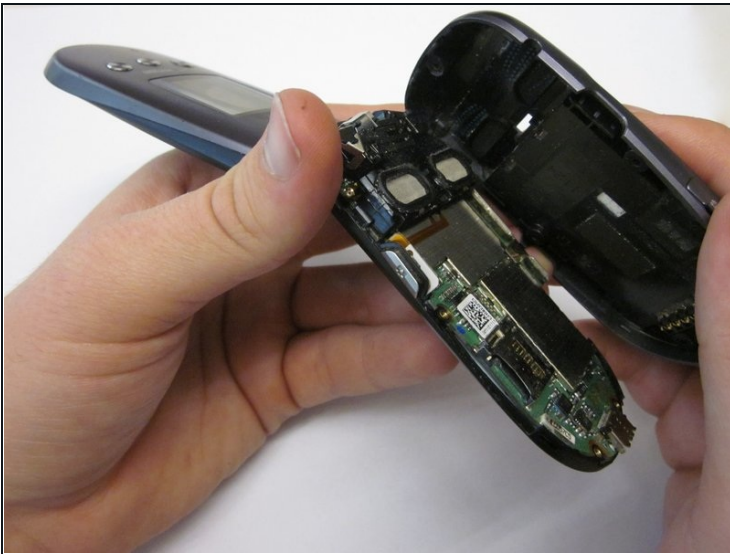

- Remove the back cover completely from the phone.

To reassemble your device, follow these instructions in reverse order.