




Disassembling Sanyo VPC-T850 Outer Casing

Written By: Jonathan Yau

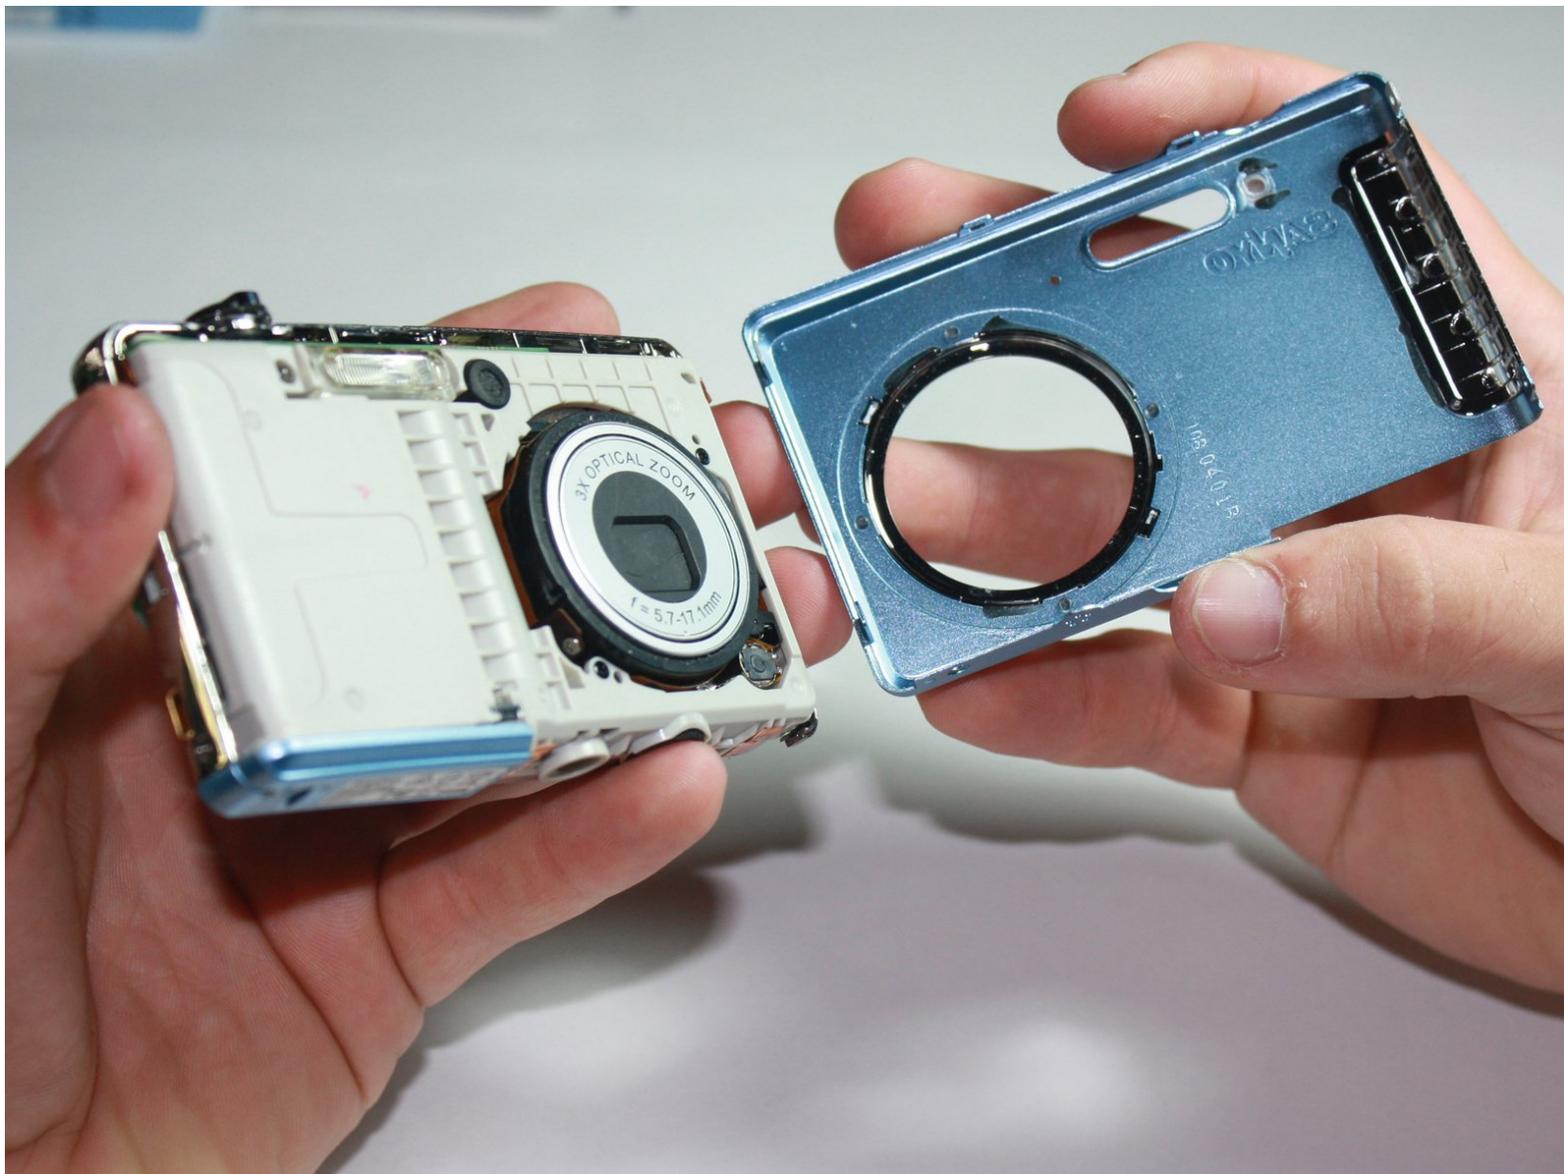

 **TOOLS:**



- Phillips #00 Screwdriver (1)
 - Spudger (1)
-

Step 1 — Disassembling Sanyo VPC-T850 Outer Casing




- Turn the camera off by pressing the small, square button embedded in the top rim of the camera.
- Locate the battery hatch on the bottom-right side of the camera and slide it outwards to open.
- In the compartment, move the small notch and push down on the battery to remove it.
- ☑ During reassembly, there is an arrow on the battery hatch indicating which way it goes in.

Step 2 — Remove Screws

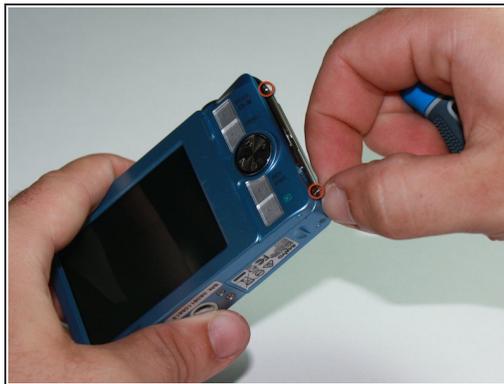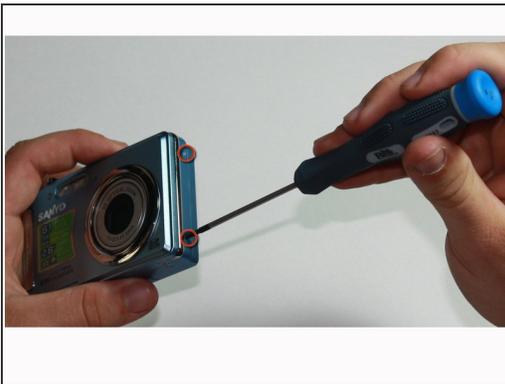

- Remove the eight screws around the sides and bottom of the camera using a Phillips #00 screwdriver.


Step 3 — Remove Rear Panel

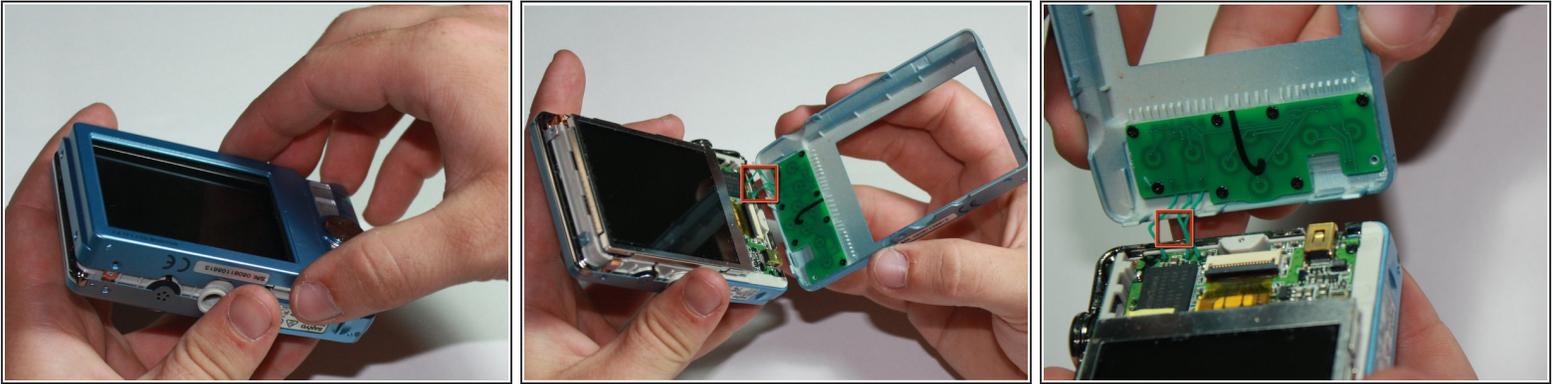

- Using the spudger, gently pry the rear panel away from the left side.

⚠ Be careful not to damage the three green cables as you remove the rear panel of the camera.


Step 4

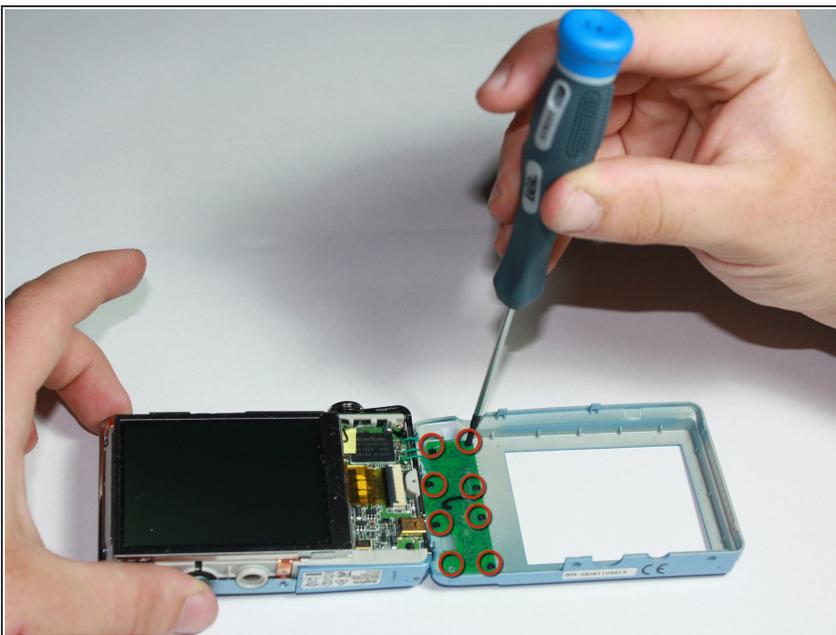

- Using the Phillips #00 screwdriver, remove the eight black screws connecting the green keypad chip to the rear panel.



⚠ Do not put any excessive force on the green wires.

Step 5

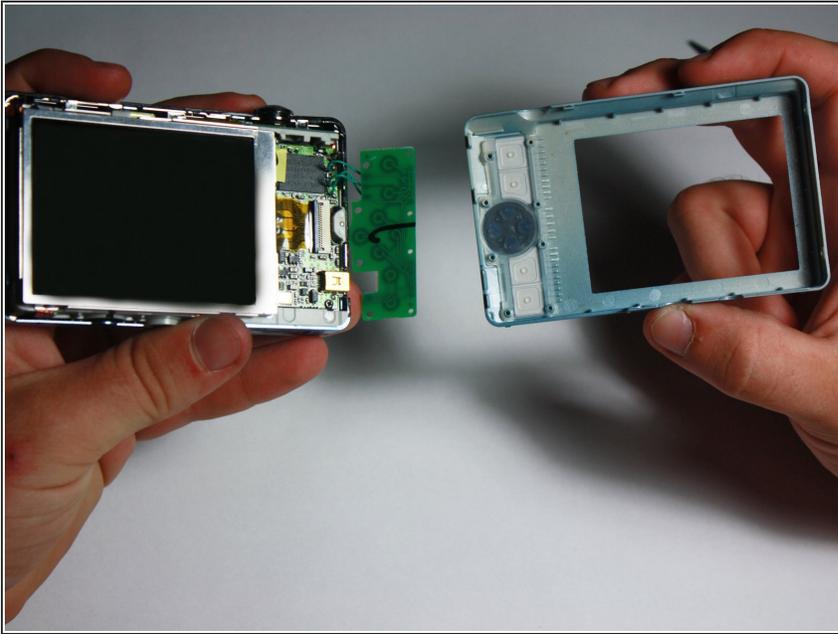


- Separate the rear panel from the rest of the camera.

Step 6

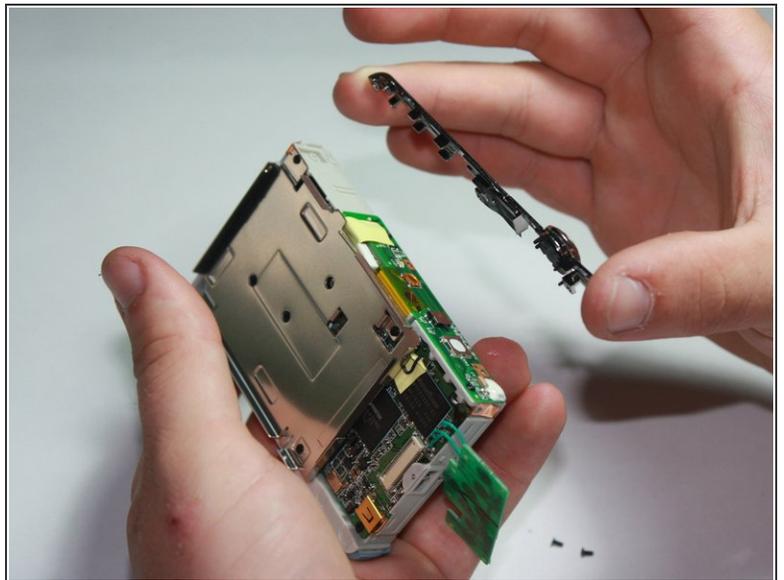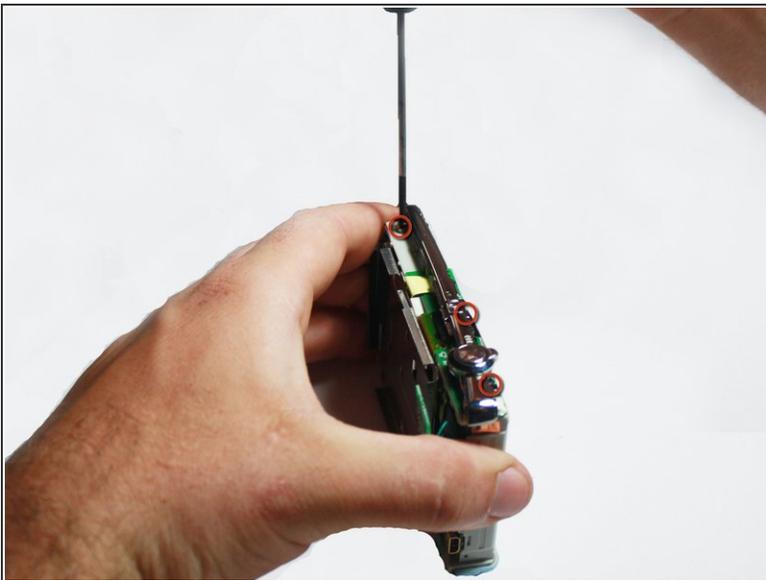

- Using the Phillips #00 screwdriver, remove the 3 screws located across the top of the camera.
- Separate the black plastic panel from the camera. The camera button will be attached, so be gentle.

Step 7

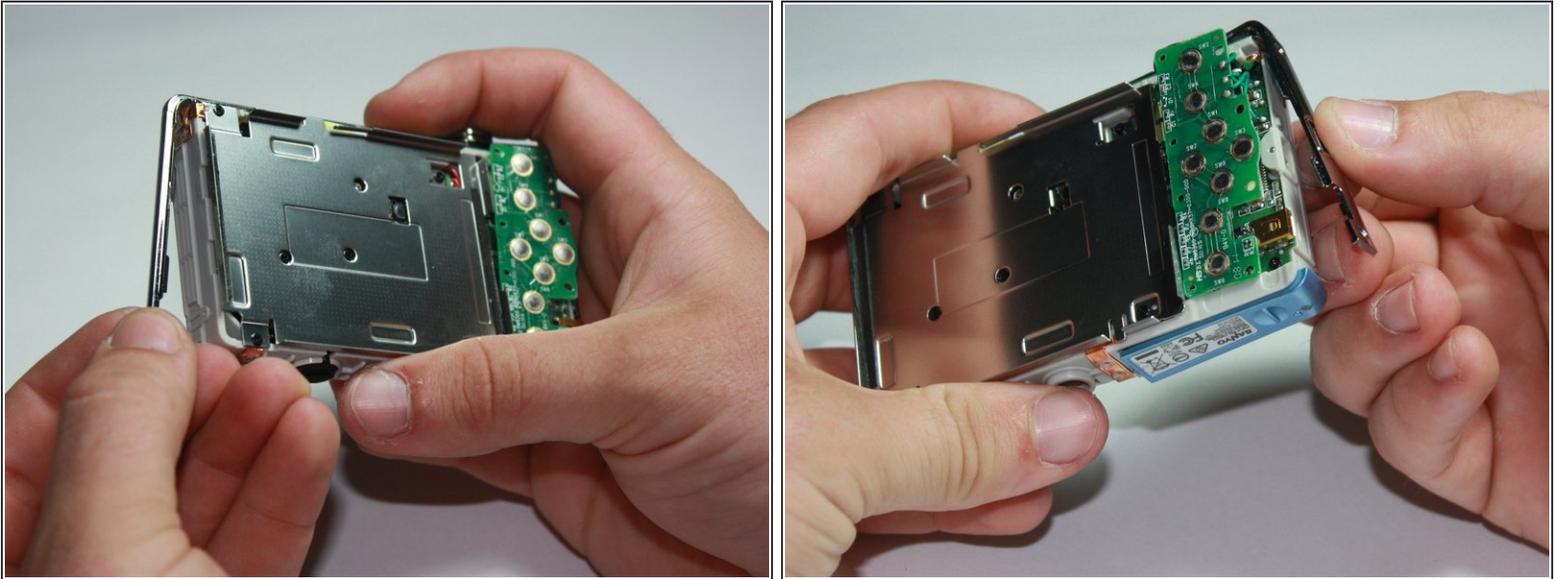

- Carefully pull off the side covers wrapped around the camera.

Step 8 — Remove Front Cover



- Using the spudger, gently lift off the front cover of the camera.

⚠ The front cover is fragile, so be gentle when removing it. It can easily break if not removed carefully.

To reassemble your device, follow these instructions in reverse order.