



Digital2 7" Tablet D2-713G GN Battery Replacement

Does your Digital2 tablet battery deplete...

Written By: Miguel A Rodriguez



INTRODUCTION

Does your Digital2 tablet battery deplete faster than it used to? Is the battery overheating or causing issues with performance? If so, it may be time to replace it. This guide will take you through the necessary steps to replace the battery. Soldering is required to complete this guide. For information on soldering, take a look at this [guide](#).



TOOLS:

[iFixit Opening Tool](#) (1)

[Spudger](#) (1)

[Tweezers](#) (1)

Step 1 — Battery

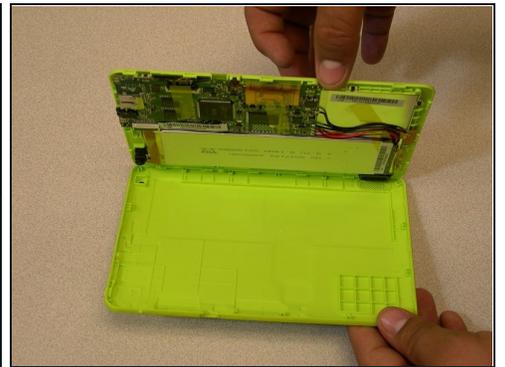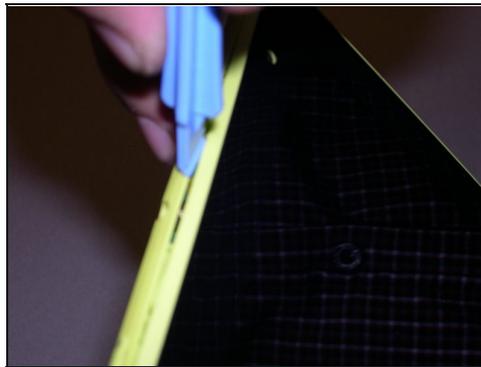

- Insert the prying tool into the crack between the case and the display border found to the right of the charging port.
- Continue to pry around the case.
- After prying all around the device, separate the back cover from the display.


Step 2



- Above the battery, peel back the yellow tape so the battery cables are not held in place.


i Do not completely remove the tape.

Step 3

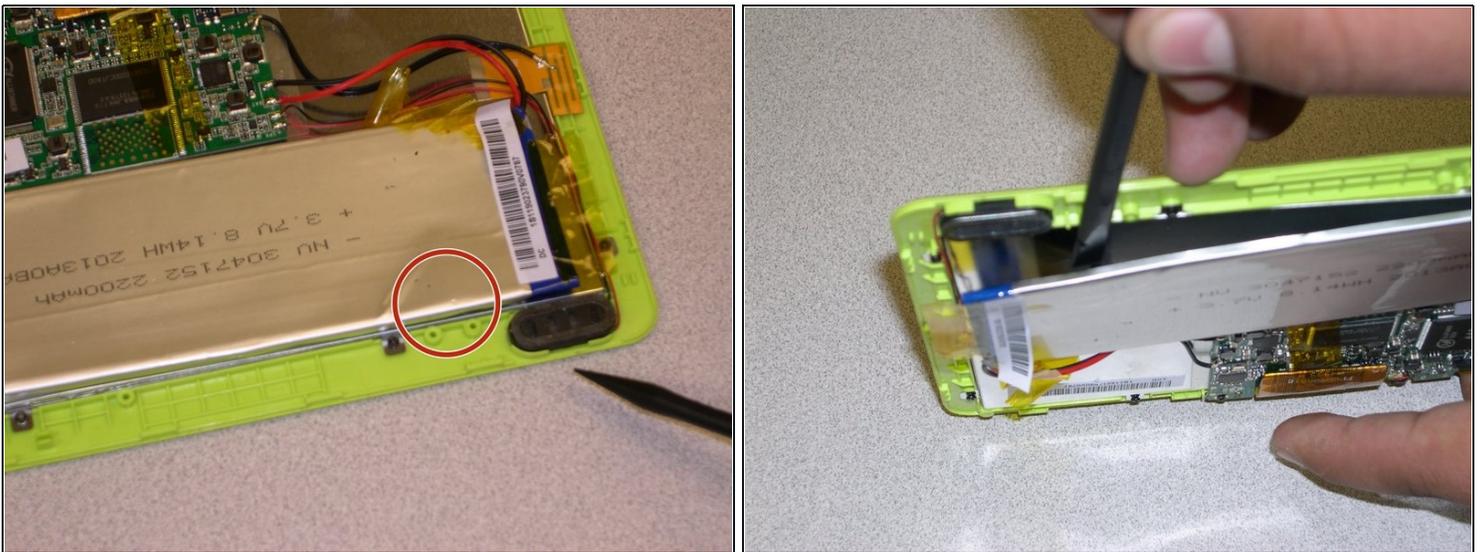

- Use the spudger to pry underneath the battery and remove it.

Step 4

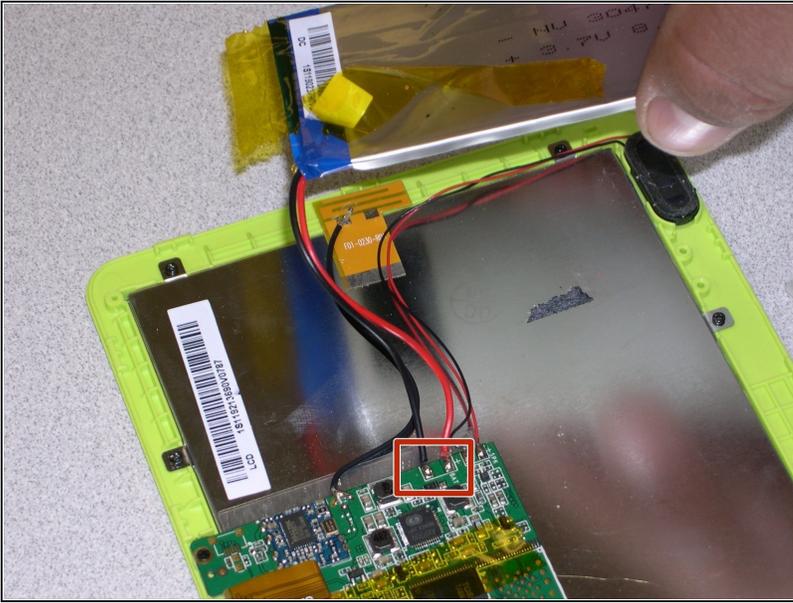

- Use the [soldering iron](#) to remove the cables from the circuit board.
- Solder the new battery cables onto the circuit board.

To reassemble your device, follow these instructions in reverse order.