



# iPhone 6 Plus Lightning Connector and Headphone Jack Cable Replacement

Prereq only for rear case.

Written By: Walter Galan



---

## INTRODUCTION

Prereq only for rear case.

---

### TOOLS:


- [iOpener](#) (1)
  - [iFixit Opening Picks set of 6](#) (1)
-

## Step 1 — Lightning Connector and Headphone Jack Cable



- i** The next step requires peeling up the Lightning connector and headphone jack cable that is affixed to the inside of the rear case with mild adhesive. We highly recommend [using an iOpener](#) on the lower backside of the rear case to soften the adhesive.

## Step 2

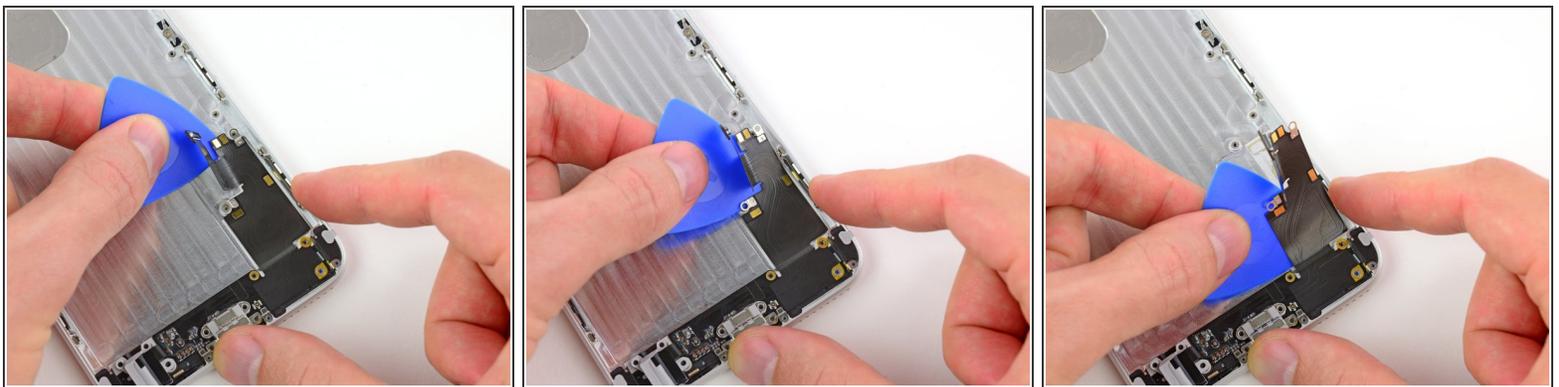

- Use an opening pick to slowly separate the Lightning connector and headphone jack cable from the rear case.
- i** Carefully work the pick down the right side of the Lightning connector and headphone jack cable, making sure to **stop** right as you hit the bottom.

### Step 3




- Insert the pick underneath the right bottom corner of the Lightning connector and headphone jack cable.

### Step 4



- Run the opening pick across the top of Lightning connector and headphone jack cable to loosen the adhesive securing it to the rear case.

## Step 5

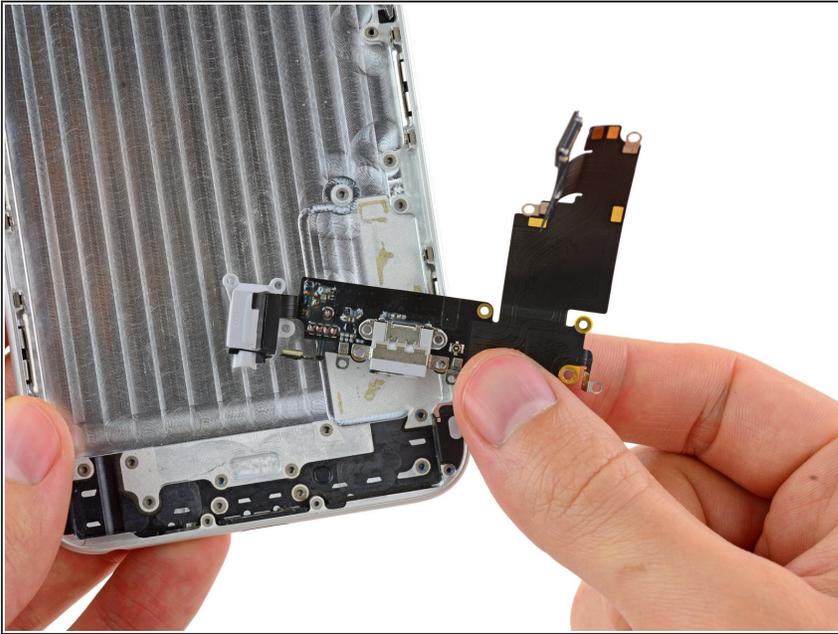

- Lift and remove the Lightning connector and headphone jack cable assembly out of the iPhone.

To reassemble your device, follow these instructions in reverse order.