



Sanyo-PM 8200 Keypad Replacement

This guide will help you replace the keypad on...

Written By: Cassandra Stavros



INTRODUCTION

This guide will help you replace the keypad on your Sanyo-PM 8200 flip phone. In order to replace it, you will need to remove the back casing from the device and lift the motherboard.

TOOLS:

[iFixit Opening Tool](#) (1)

[Push Pin](#) (1)

[Spudger](#) (1)

[Tri-point Y1 Screwdriver](#) (1)

[Tweezers](#) (1)

Step 1 — Power Off Phone



- Power down the phone by holding down the red "end" button.

Step 2 — Remove Old Battery



- Push and hold the button on the back toward the direction of the arrow to unlock the battery.
- Lift and remove the battery from the back of the phone.

Step 3 — Back Casing



- Use a push pin or [tweezers](#) to remove the neoprene screw-cover located on the upper, left corner of the back casing.

Step 4



- Unscrew all four, 5mm Tri-Wing screws.

Step 5



- Pry the back casing off the device using a spudger. Work your way along the edges to completely separate the back casing from the device.

⚠ This step may require extra force. But too much force could break the back casing.


- Remove the headphone jack cover when separating the back casing. The headphone jack is located on the opposite side of the antenna.

Step 6 — Keypad



- Remove the camera and call keys from the side of the phone where the antenna is located.
- Remove the Readylink and volume control buttons from the other side of the phone.


Step 7

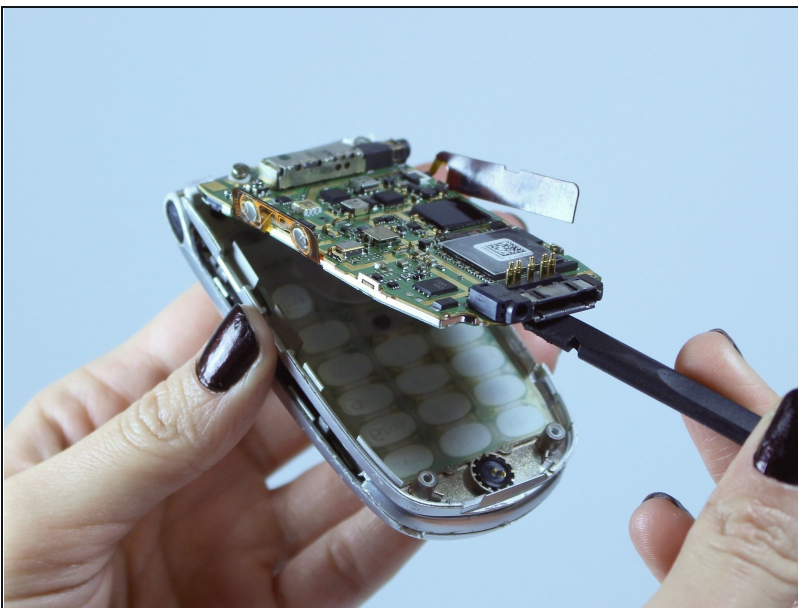

- Place the plastic opening tool underneath the motherboard and gently lift up.

⚠ Be careful not to damage the flex cable ribbon connecting the motherboard to the device.

Step 8

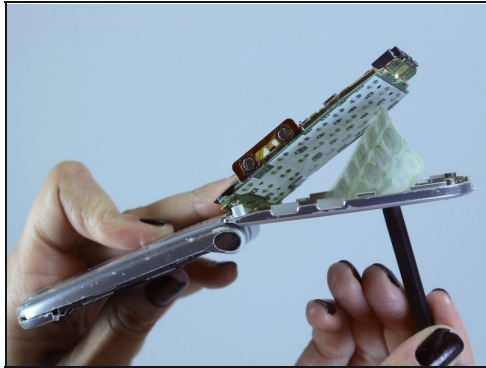

- Flip open the phone to reveal the keypad.
- Place the plastic opening tool underneath the keypad and gently push the keypad towards the motherboard.
- Remove the keypad.

To reassemble your device, follow these instructions in reverse order.