



HMDX Jam Battery Replacement

Show you step by step how to replace the jambox battery that is past its charge cycle.

Written By: Prince Tendai Dzonga



INTRODUCTION

Outline what you are going to teach someone how to do.



TOOLS:

- [Soldering Iron](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Phillips #1 Screwdriver](#) (1)
-

Step 1 — Opening speaker



- Use the plastic opening tool to pry off the rubber cover at the bottom of the speaker.

Step 2 — remove rubber cover




- Gently remove the rubber cover to expose the screws. If necessary, poke holes through the glue residue to expose the screw heads.

Step 3 — Remove screws




- Once you have exposed the screws, use a #1 Phillips screwdriver to remove the four 9 mm screws.
- ⓘ It would be wise to use a magnetic mat for the screws for safekeeping.

Step 4 — Exposing Battery

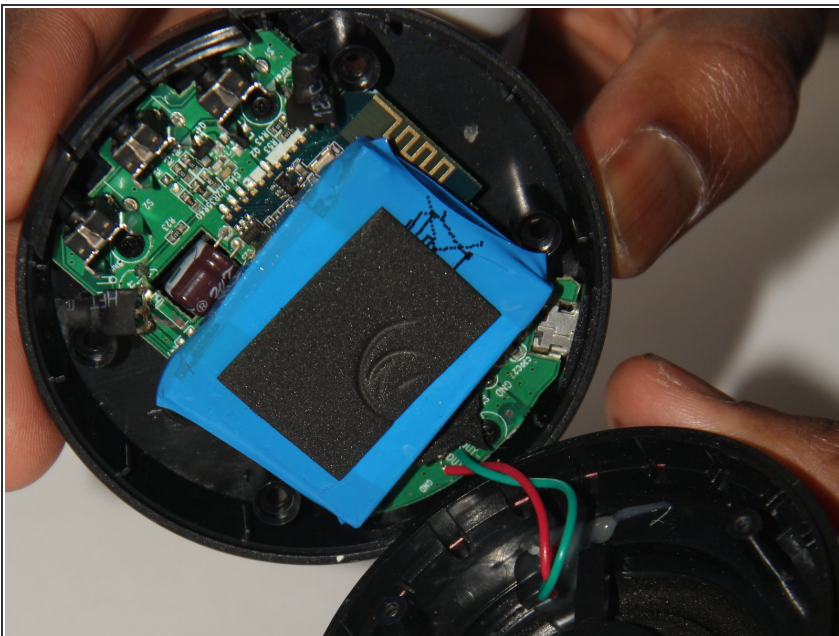



- Once you've removed the screws, open the case slowly. The battery is covered in blue packaging.

Step 5 — Removing Battery

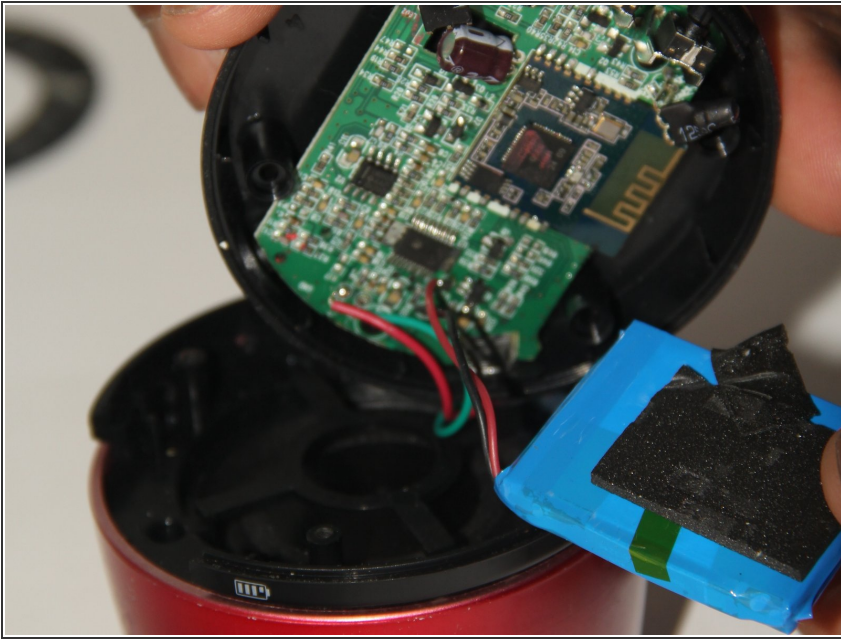

- Very gently remove the battery from the motherboard.

Step 6 — Remove battery attachments

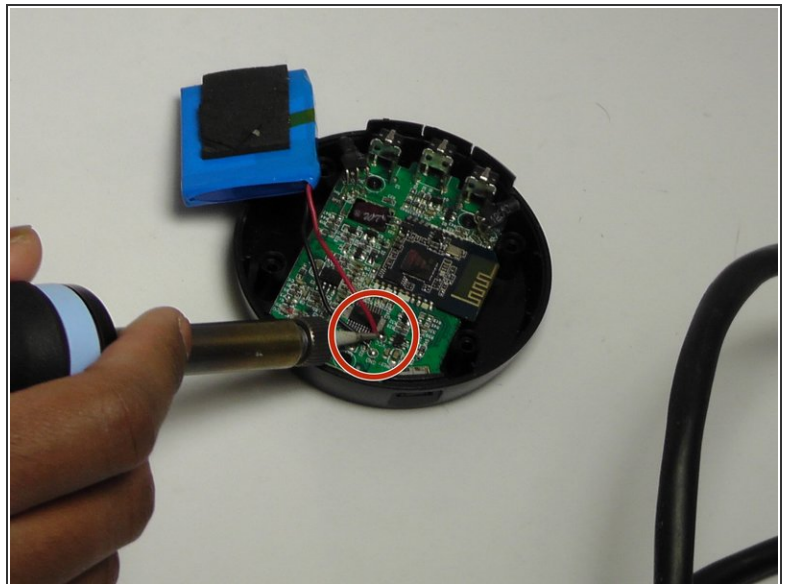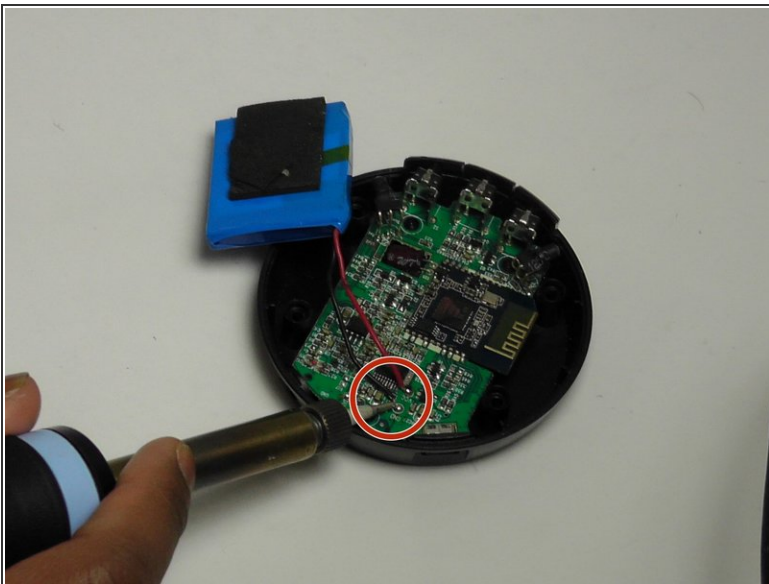

- Use a solder gun to remove the battery attachments from the motherboard.

To reassemble your device, follow these instructions in reverse order.