




Digital2 D2-912 Speaker Replacement

We will be replacing the speaker in the tablet...

Written By: Lindsay Richardson

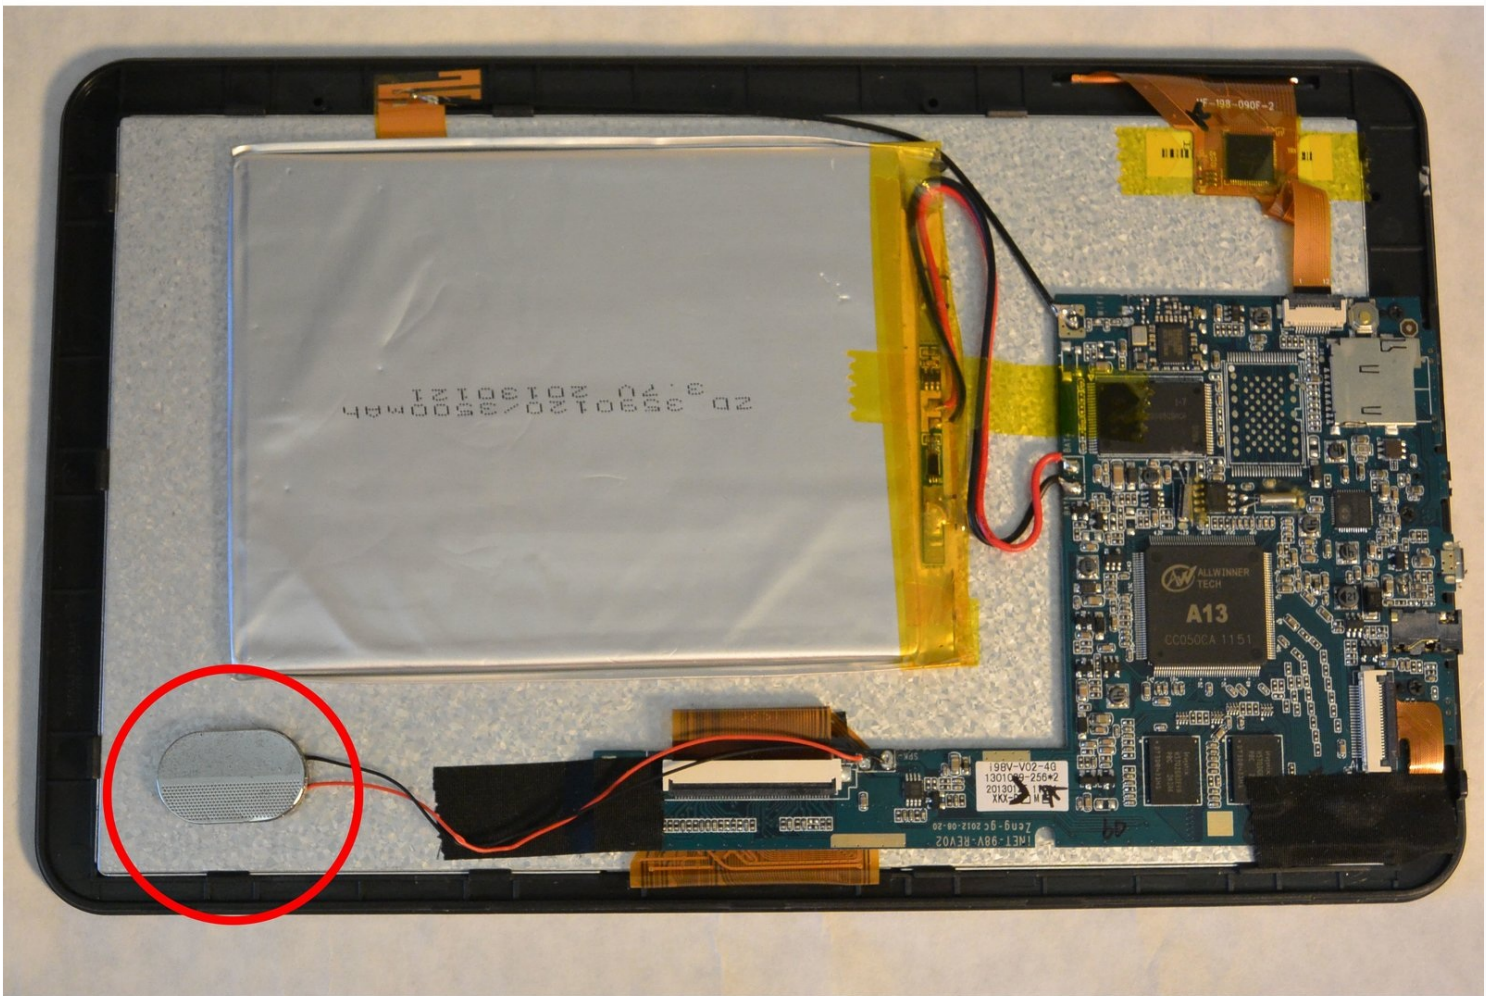

INTRODUCTION

We will be replacing the speaker in the tablet by first taking the tablet apart. Luckily it can be easily removed with wire cutters or a soldering iron.


TOOLS:

Phillips #00 Screwdriver (1)

Soldering Iron (1)


Solder Vacuum (1)

Step 1 — External Cover

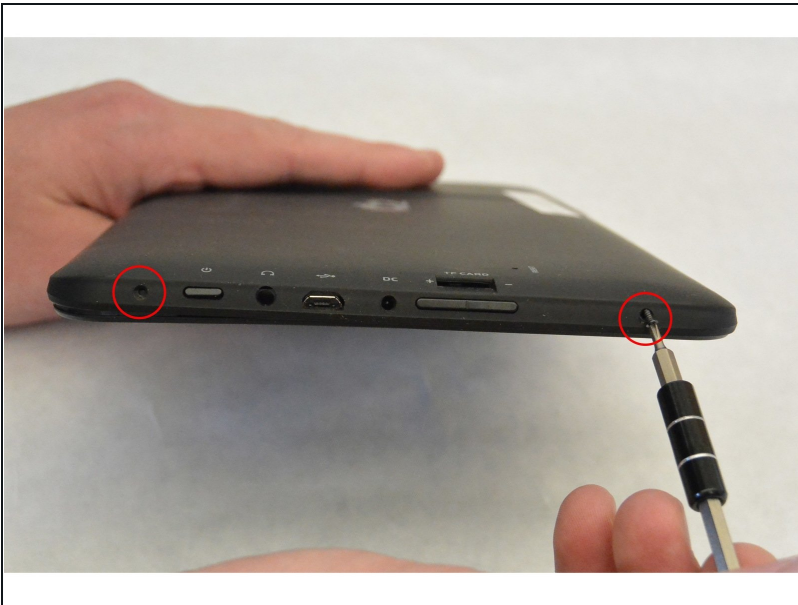


- Remove the two Phillips #00 screws from the bottom of the case.

Step 2

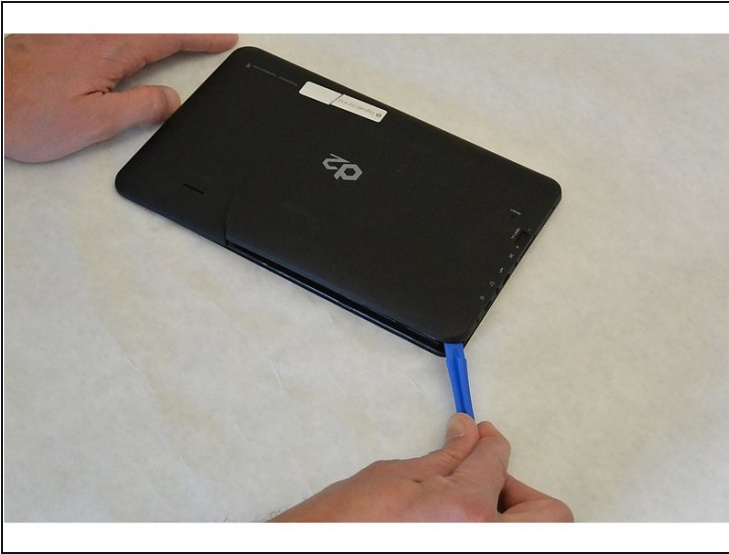


- Wedge the opening tool in the space between the back and the front of the tablet.
- Carefully work your way around the perimeter, wedging the opening tool between the front and back of the tablet.
- When the back of the tablet is mostly detached from the front, carefully pull it away completely.

Step 3 — Speaker

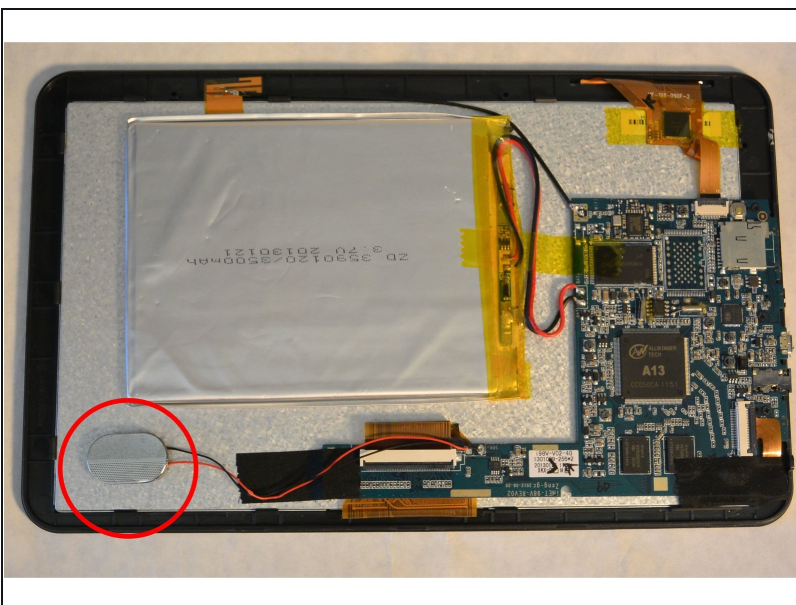

- Pull the speaker away from the tablet. It should easily come off, as it is held on with a magnet.

Step 4

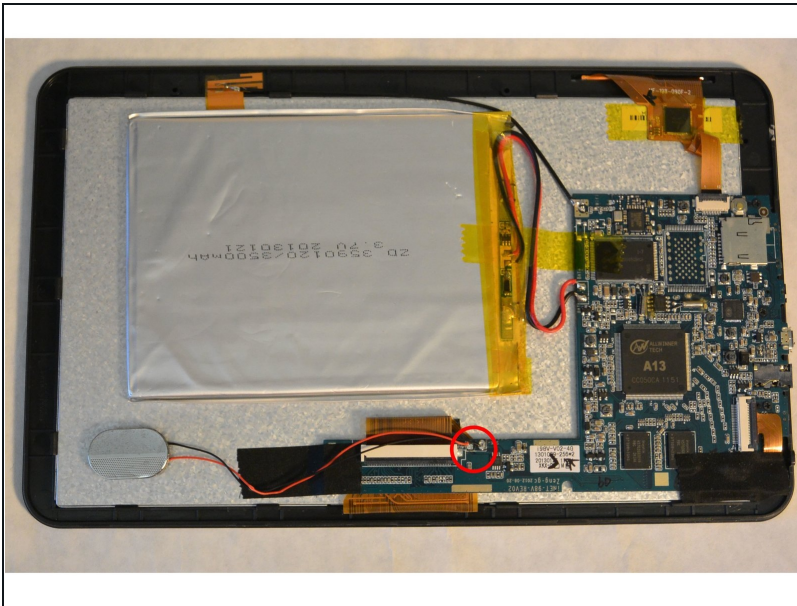

- Remove the wires from the motherboard using a soldering iron and a [solder sucker](#).
- Refer to ifixit's [soldering guide](#) to remove the solder on the wires.

To reassemble your device, follow these instructions in reverse order.