




# HTC Wizard 200 Camera Flash Replacement

Installation of the camera flash on the HTC Wizard 200.

Written By: Kyle Champ

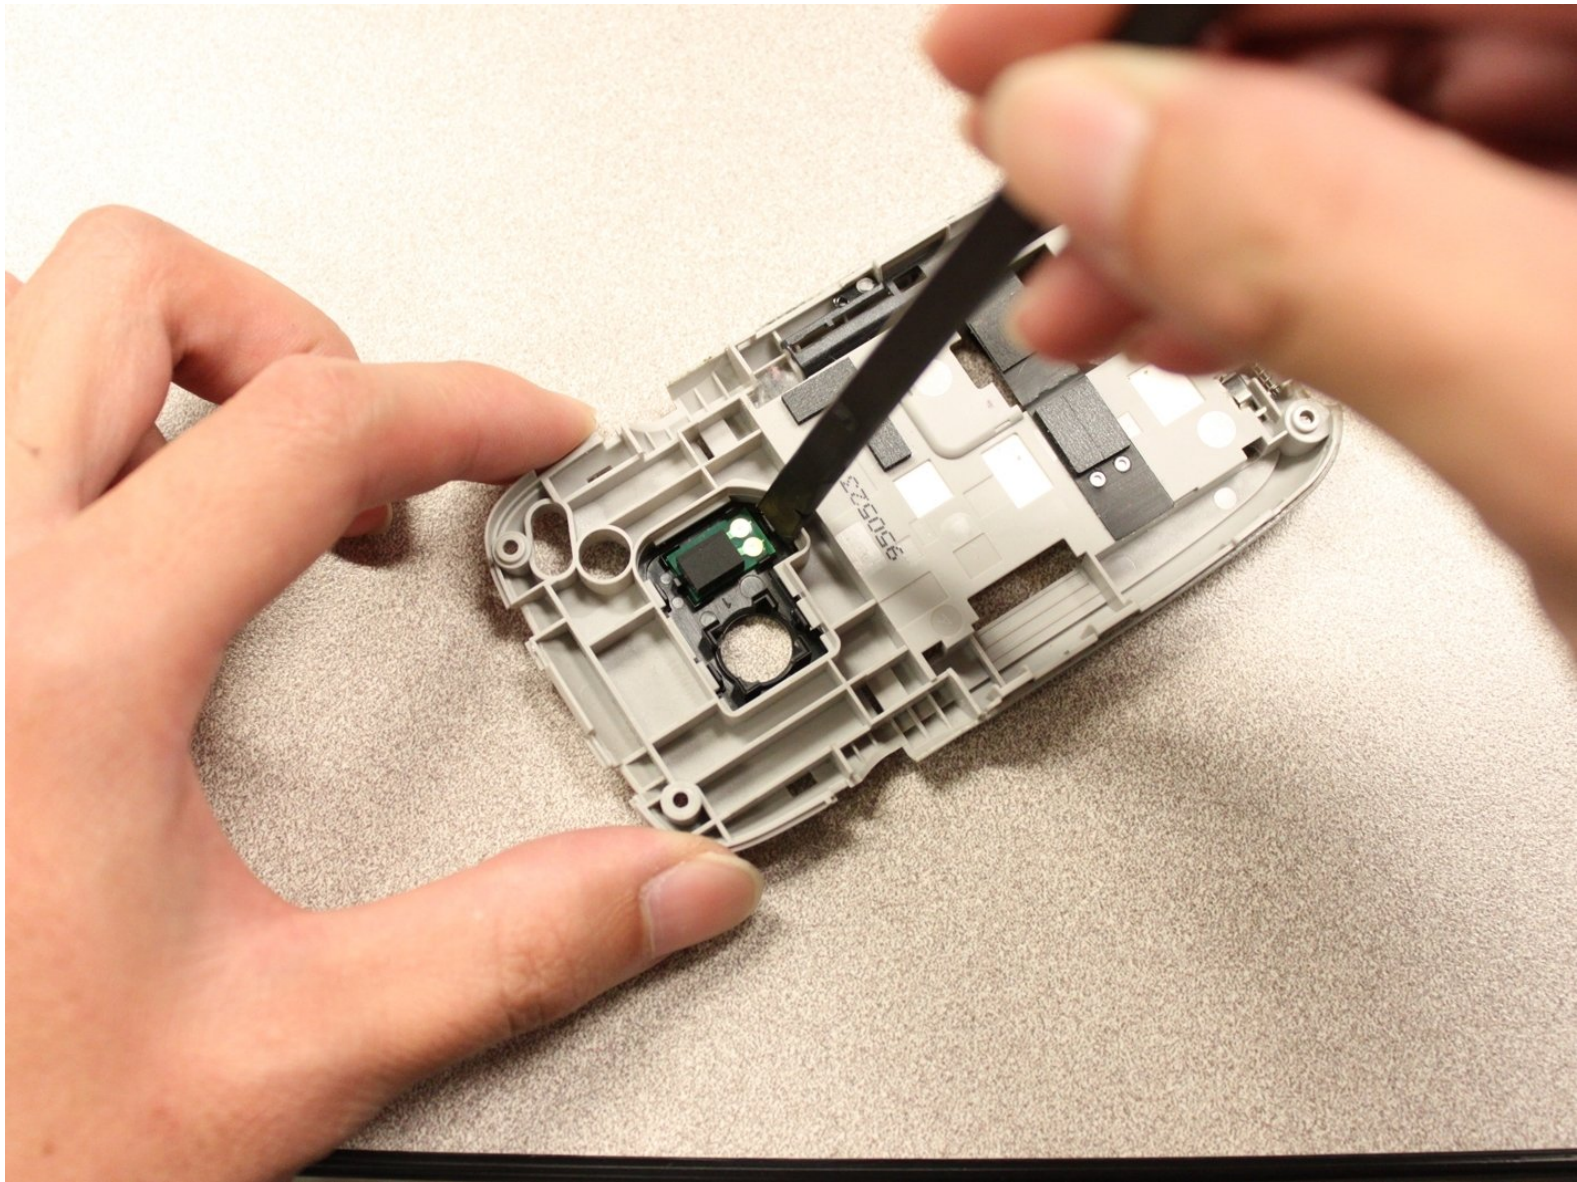

---

# INTRODUCTION

This guide will explain how to install / remove the camera flash on the HTC Wizard 200.

---



## TOOLS:

- [iFixit Opening Tool](#) (1)
  - [Spudger](#) (1)
  - [T5 Torx Screwdriver](#) (1)
-



## Step 1 — Battery



- To expose the battery, remove the outer case with your fingernail.
- Remove the battery by pulling the black tab.

## Step 2 — Back Panel



- Insert the flat end of the [spudger](#) into the two notches on the back of the camera cover and pry them up.




## Step 3




- Work the [spudger](#) around the edges of the camera cover until it comes off.

## Step 4

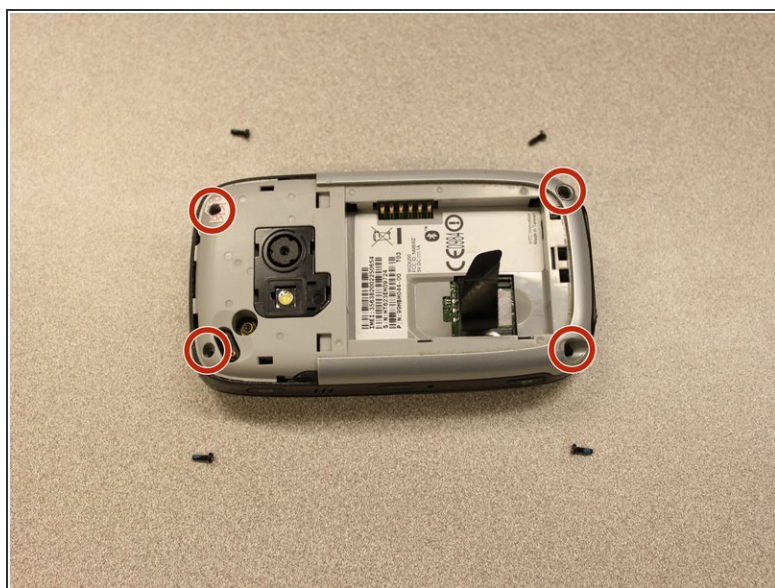

- Remove the four 6 mm screws with the [T5 Torx screwdriver](#).

 One of the screws is under the "void" sticker.




## Step 5




- Insert the flat end of an iFixit opening tool between the side and inner covers to create a gap.
- Work the tool around the edges until all the clips release.

## Step 6

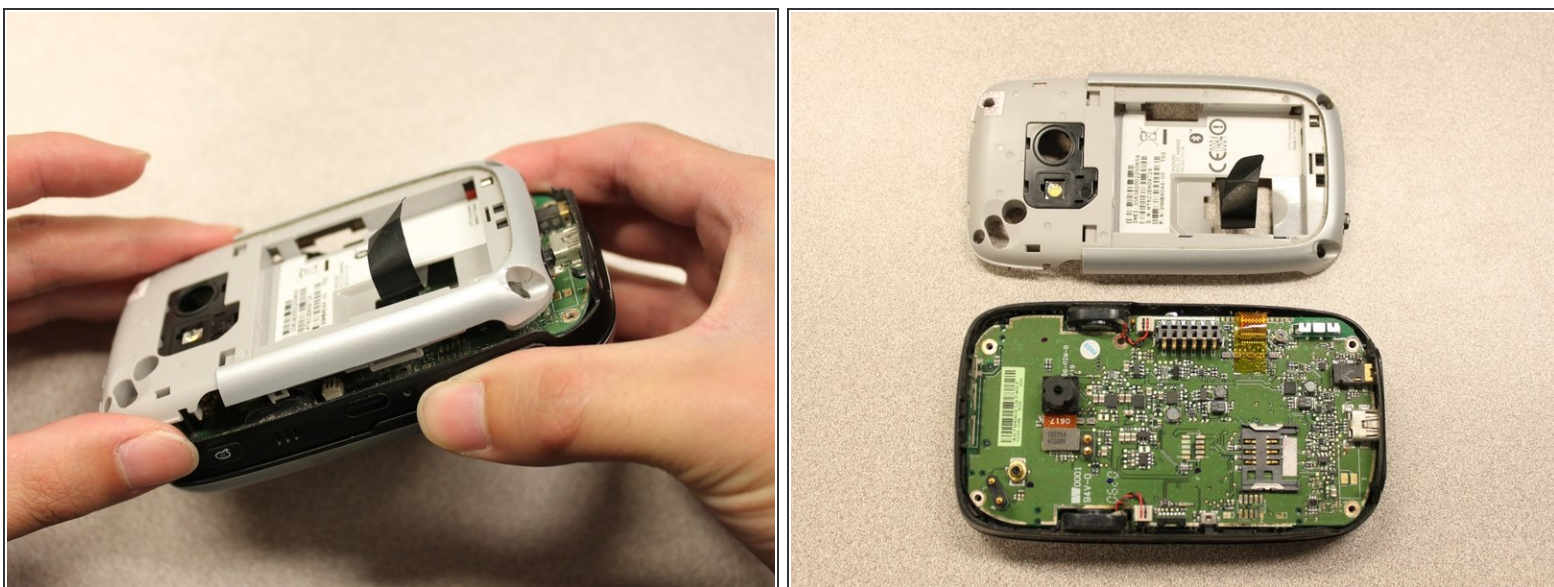

- Once all the clips are open, remove the inner panel from the phone.

## Step 7 — Camera Flash

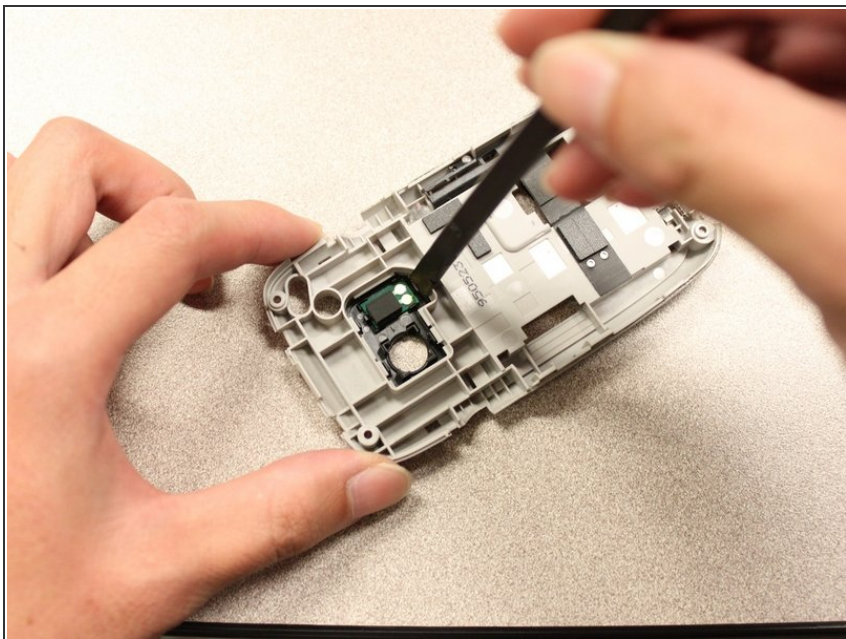

- Use the spudger to pry out the camera flash module.

To reassemble your device, follow these instructions in reverse order.