

Pandigital Super Nova Battery Replacement

How to replace the battery of your Pandigital Super Nova.

Written By: pfcprice




INTRODUCTION

This guide demonstrates how to remove and replace a Pandigital Super Nova battery and preserve the function of your device.

TOOLS:

- Metal Spudger Set (1)
- Phillips #0 Screwdriver (1)
- Tweezers (1)
- iFixit Opening Tools (1)

Step 1 — Battery

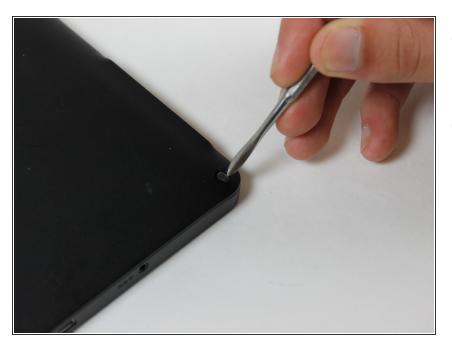

- Remove the screw covers from each corner of the back side of the device.
- Set aside.

Step 2




- Using a Philips screwdriver, remove all four .15 mm screws from each corner.
- Set aside.

Step 3




 Using the plastic opening tool, remove the back cover of the device.

Step 4

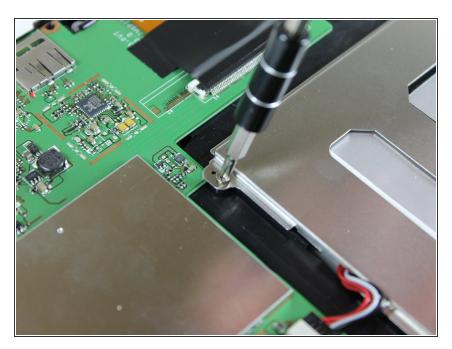

- Remove the three .11 mm screws that hold the battery in place.
- Set aside.

Step 5

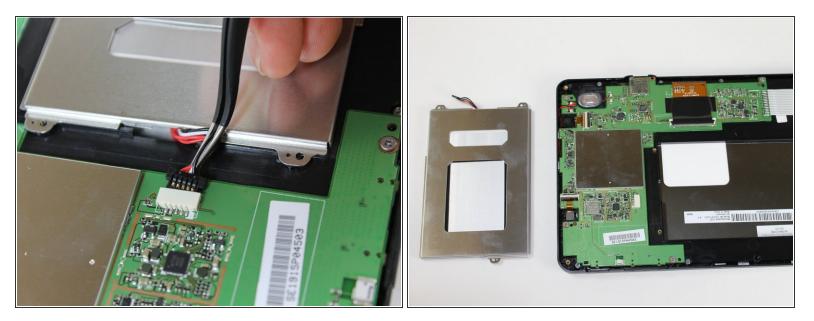

Unplug the battery and remove from device.
Avoid touching the motherboard as it is fragile.

To reassemble your device, follow these instructions in reverse order.