




Samsung Galaxy S4 Active I537 Charging port Replacement

how to replace the charging port for samsung galaxy 4 active att SGH I537

Written By: ted582 ted583

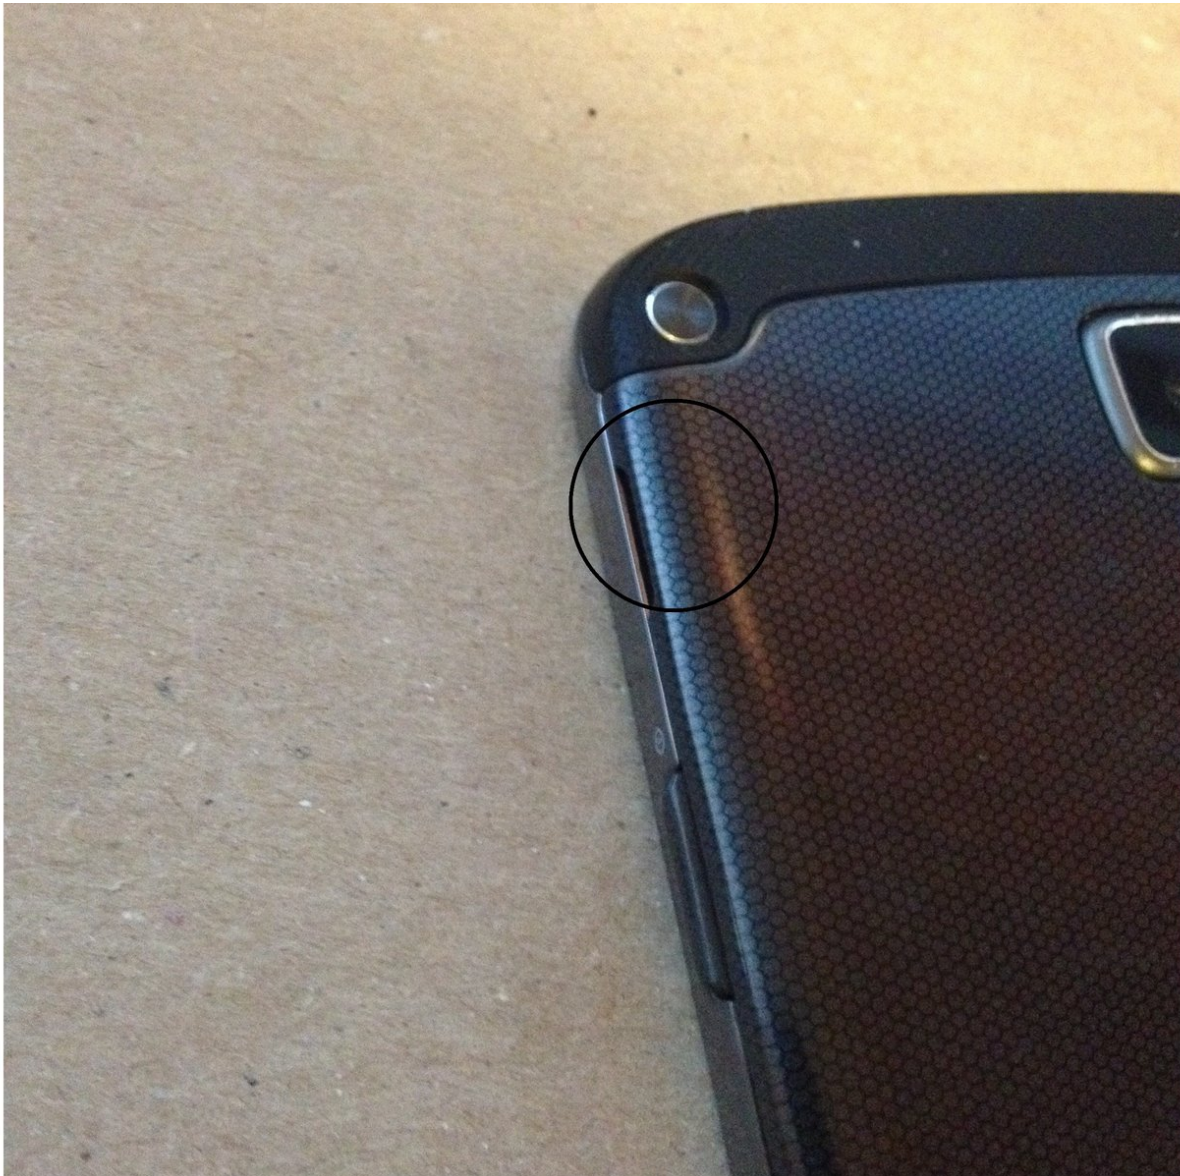

INTRODUCTION

how to replace the charging port for samsung galaxy 4 active att SGH I537



TOOLS:


- [Phillips #000 Screwdriver](#) (1)
- [Tweezers](#) (1)
- [iFixit Opening Tools](#) (1)



PARTS:

- [Samsung Galaxy S4 Active Charging Assembly](#) (1)

Step 1 — Rear Cover

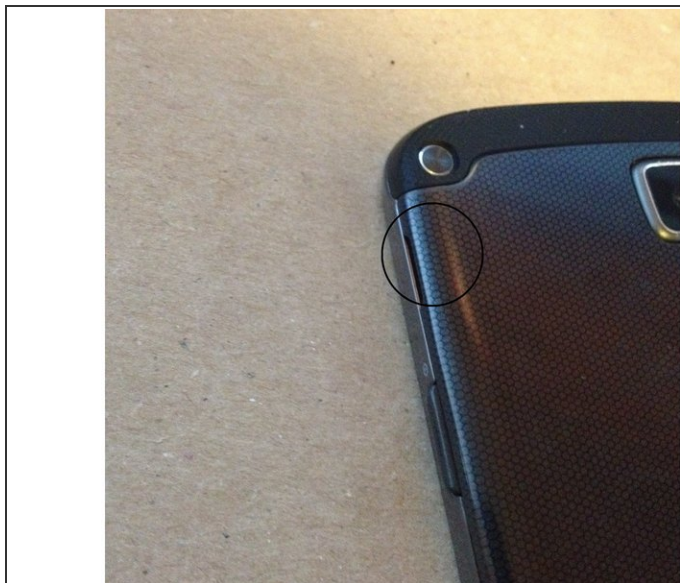

- Remove back cover
- Remove battery

Step 2 — remove screws




- remove battery before taking off screws
- remove the 8 screws in the back using a small Phillips screw driver

Step 3 — Covers



- using a prying tool or something remove the 4 covers that are blocking the last 4 screws
- ⓘ you might have to put a bit of pressure to get them off

Step 4 — More screws

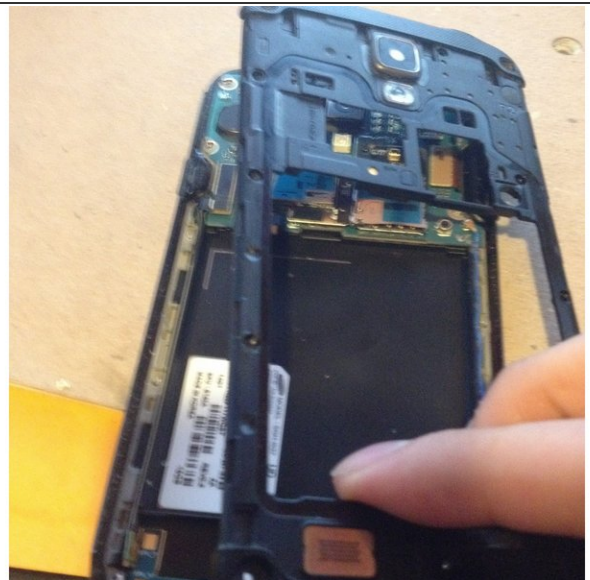


- Remove the 4 screws
- with a prying tool or fingers go around the edges to remove the plastic back part of the phone
- ⚠ be carefull not to break it by using too much force

Step 5 — Screws



- Remove these 2 screws then take off the white plastic part


Step 6 — Antenna cable

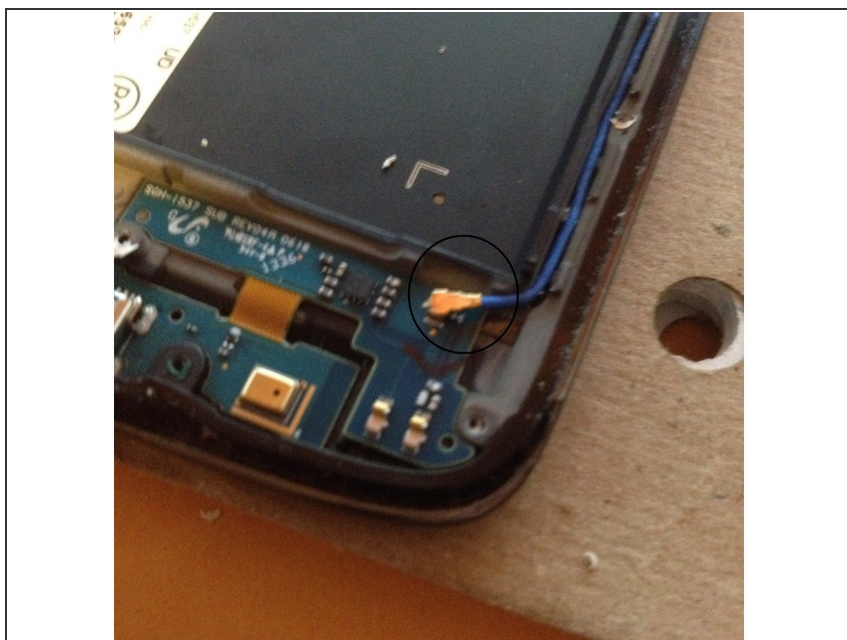

- use prying tool or finger to unplug antenna cable

⚠ be extra careful unplugging this


Step 7

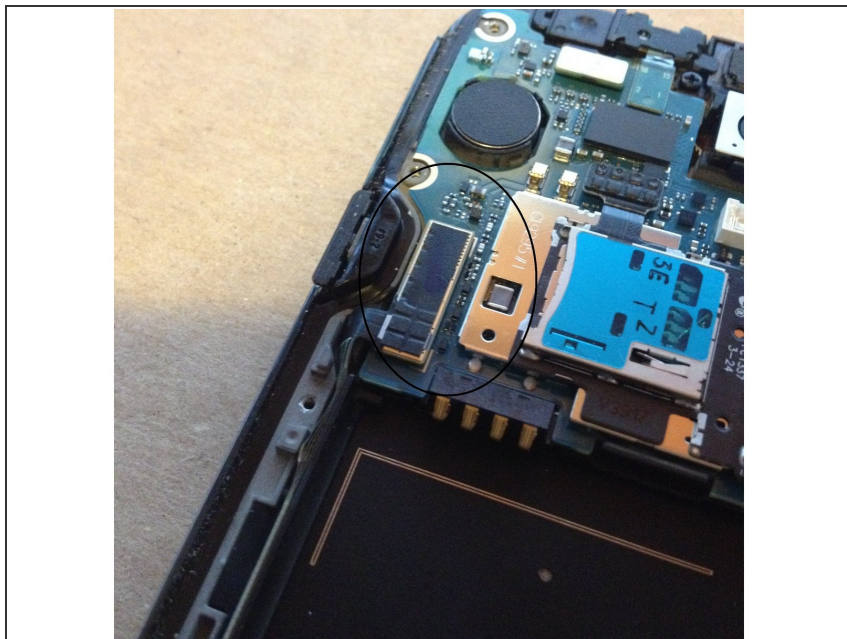

- use prying tool or fingers to unplug this connection

⚠ again be careful

Step 8

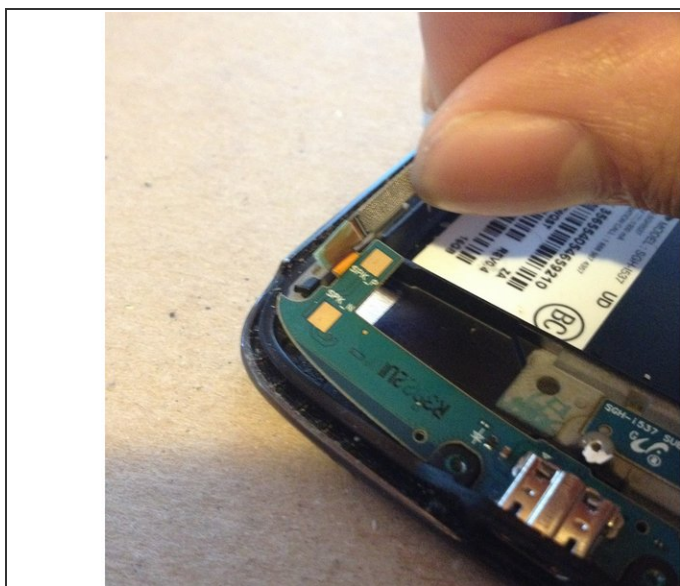

- you can now use the prying tool or fingers to remove the charging port and replace it with the new one
- follow steps in reverse to resemble

⚠ carefully

This document was generated on 2020-12-10 12:21:17 PM (MST).

To reassemble your device, follow these instructions in reverse order.