



Lenovo ThinkPad X395 Back Cover Replacement

Written By: Clay Eickemeyer



INTRODUCTION

This guide will demonstrate how to open the back cover panel of a ThinkPad X395. Use this guide to access the internals of the laptop before performing any maintenance or repairs.



TOOLS:

- [iFixit Opening Picks \(Set of 6\)](#) (1)
 - [Phillips #1 Screwdriver](#) (1)
-



Step 1 — Loosen the back screws



⚠ For your safety, discharge the battery below 25% and power down your device before disassembly.

- Use a Phillips #1 screwdriver to fully loosen the five screws on the back cover.
- ⓘ These are captive screws—they won't come out after being loosened.

Step 2 — Release the clips

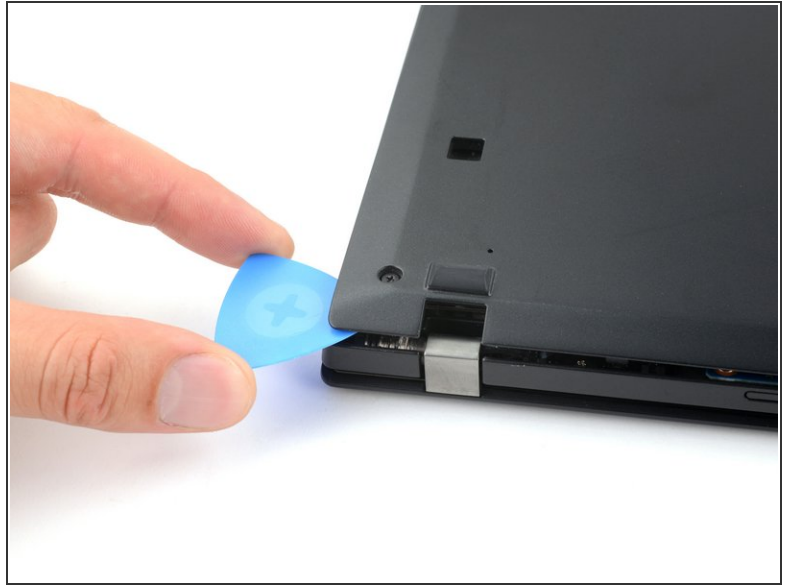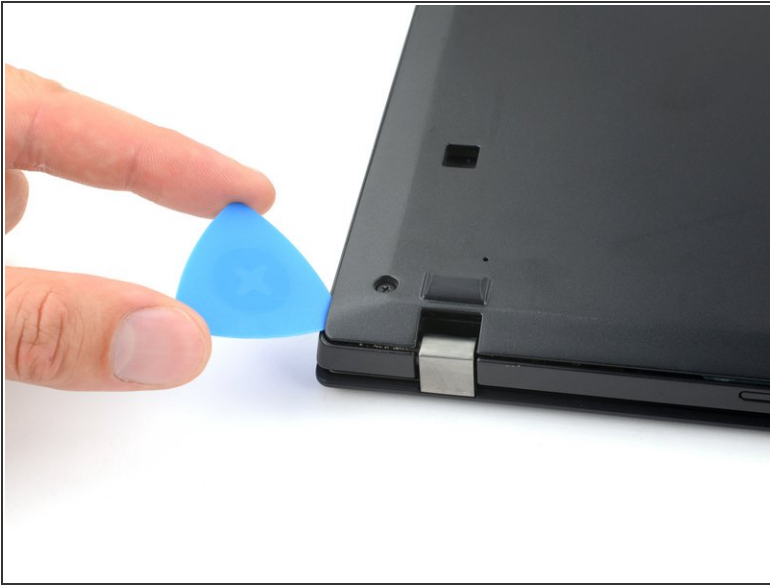


- Orient your laptop so that the screen's silver hinges are closest to you.
- Insert an opening pick between the back cover and the device body near a hinge corner.
- Pry upward to release the retaining clips. Listen for a loud click when each clip releases.

Step 3



- Insert the opening pick between the back cover and the device body at the other hinge corner.
- Pry upward on the cover to release additional clips.

Step 4 — Remove the back cover

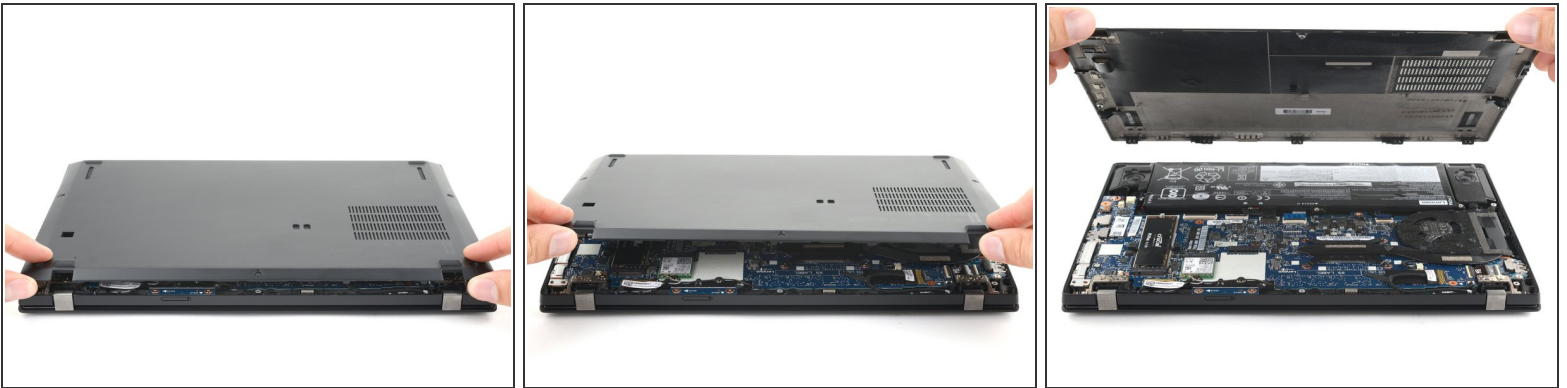

- Lift and remove the cover up from the laptop, starting with the edge nearest to you.
- Shift the cover side to side if the center clip feels stuck.
- ⓘ The cover will hinge open before completely separating from the rest of the laptop.

To reassemble your device, follow these instructions in reverse order.

Take your e-waste to an [R2 or e-Stewards certified recycler](#).

Repair didn't go as planned? Try some [basic troubleshooting](#), or ask our [Lenovo ThinkPad answers community](#) for help.