



Xiaomi Mi Pad Motherboard Replacement

Remove the motherboard from your Xiaomi Mi Pad.

Written By: Kiefer Sivitz



INTRODUCTION


Use this guide to remove the motherboard from your Xiaomi Mi Pad.



TOOLS:

- [Phillips #000 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [SIM Card Eject Tool](#) (1)
 - [iFixit Opening Picks set of 6](#) (1)
-

Step 1 — Rear Case Assembly

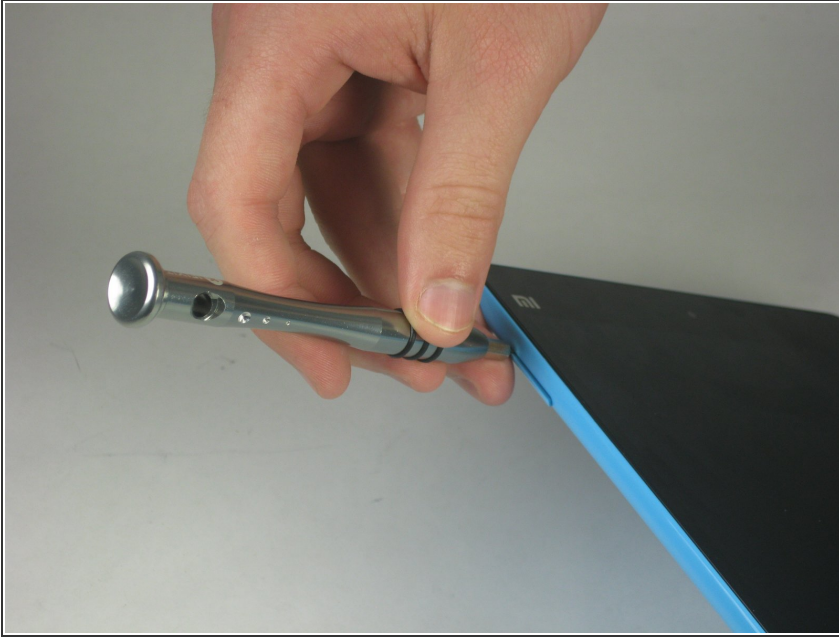


- Remove the micro SD card slot from the left side of the device using either the metal pin included with the device or a SIM card eject tool.

Step 2



- Use a plastic opening tool and/or opening pick to gently pry the back panel away from the device. Work your way around the device, slowly increasing the gap.

 The back panel has small clips and light adhesive that easily releases from the device.

Step 3 — Motherboard



- Remove the twelve 3 mm Phillips #00 screws on the upper cover of the device.

Step 4



- Remove the upper cover from the device.

Step 5



- Remove the two 3.0 mm Phillips #00 screws securing the motherboard to the device.

Step 6



- Disconnect the six ribbon cables attached to the motherboard using a plastic opening tool.

Step 7



- Carefully remove the motherboard from the device.

To reassemble your device, follow these instructions in reverse order.